

min

Community of the second

CATALOG 2025

UB

3

THE PROFESSIONAL'S CHOICE SINCE 1951



00.	About RUBI Group
04	Introduction
01.	Electric tile cutting
01. 22	Electric tile cutting Electric cutters and miter saws

02.	Diamond blades
34	Dry and wet cutting diamond blades

03.	Grinding & polishing
38	Grinding wheels and blades
40	Polishing pads

04.	Manual tile cutting
44	Manual Tile Cutters
59	Scoring wheels and accessories for manual cutters

05.	Slab System
64	Cutting large tile
70	Handling large tile
79	Installing large tile

06.	Mixing
85	Electric Mixers
91	Mixing Paddles

07.	Drilling
93	Tools for drilling ceramic tile, stoneware, marble, granite and other materials
98	Accessories for diamond drill bits

08.	Tools for fixing tiles and finishings
99	Trowels, Notched trowels
101	Margin trowels, scrapers and accessories
106	Floats, Rubber trowels

09.	Accessories for tile fixing and finishing
107	Tile Spacers
110	Delta System
111	Cyclone System

10.	Rubble chutes, buckets & tubs
114	Plastic tubs "flextub"

11.	Safety equipment
114	Knee pads, ergonomic seat and cushion

12.	Accessories for Cleaning and Finishing
116	Sponges, floats and pads
120	Washboys
13.	Pal box and displays
119	Palbox and displays



DISCOVER THE NEW RUBI PRODUCTS 2025

CRAFTING

NEEDS

INNOVATIO

NEW TK TILE CUTTER

Meet the first asymmetric monoguide tile cutter worldwide.

We know you work hard and you probably workout. But you don't need two strong arms when you have:

- •3,307 lbs breaking power
- Breakage control
- •Perfect visibility
- •Cut up to 7/8 inch
- Incredibly smooth cut
- Great stability
- ·Easy transport and folding

VISIONARIES SEE FURTHER

Pag. 46

NEW DC-250 SMART ADVANCE

True Intelligent Cutting.

Constantine and the second



THE BEST OPTION FOR EACH JOB SINCE 1951

At RUBI Group, we are experts in the design, manufacture and distribution of revolutionary machinery and tools for cutting, laying and maintaining tiles. Our relentless dedication to excellence has positioned us as the undisputed leaders in the industry. Every product we create is the result of our passion for innovation and our unwavering commitment to quality. With the invention of the first hydraulic mosaic tile cutter in history, invented and patented by the Boada brothers in 1951, RUBI has always worked with a clear mission: to provide differentiated solutions to construction professionals by providing maximum efficiency, profitability and safety for the optimal installation of ceramic tiles.

In this way, by placing the installer at the center of our strategy, we ensure that **innovation**, **the high quality of our products and excellence are fundamental principles throughout our product range**. The RUBI brand is currently recognized by the most demanding construction and design professionals in more than 120 countries, thanks to our robust international network of subsidiaries and branches.

WE PROVIDE QUALITY AND INNOVATION TO THE WORLD

RUBI IS RUBI ALL OVER THE WORLD



At RUBI Group, our multidisciplinary team is highly qualified and undergoes continual training. We are firmly committed to excellence, respect and passion, core values that guide our actions every day.

Our team is made up of more than 600 professionals in 11 subsidiaries and 9 branches around the world. Our experience and knowhow support us in providing quality solutions at an international level.



BETTER PROFESSIONALS. BETTER PLACES.

THE RUBI 'BETTER PROFESSIONALS, BETTER PLACES' **COMMITMENT.**

At RUBI Group we are guided by our corporate purpose "Better Professionals. Better Places" that reflects our focus on two fundamental aspects, improving the quality and performance of our industry through the professionals whose talent is recognized by all, as well as the places they transform with their creativity.

We strive to change the future by being leaders in training exceptional professionals and contributing to building exceptional places, for the benefit of a better world.

SDG FOR A SUSTAINABLE AND EQUITABLE FUTURE

Our commitment focuses on sustainable development as part of our Corporate Social Responsibility strategy, which encompasses the three key areas of sustainability: social, environmental and economic.

In doing so, we draw on 8 of the 17 Sustainable Development Goals (SDGs) set by the United Nations for the period 2015-2030, which guide us on our path towards a future with a focus on sustainability.

We firmly believe that environmental policies and social and economic sustainability are the responsibility of the



Training for construction students at the BTP CFA apprenticeship centre in Antibes, France.



Collaboration with the Vicente Ferrer Foundation in the construction of housing for vulnerable people in Anantapur, India.



entire RUBI team. Only in a fairer, more equal and more sustainable world can we continue growing and working together with society and our environment.

TOGETHER WE ARE BUILDING A SUSTAINABLE AND EQUITABLE FUTURE FOR ALL.





Beach clean-up in Florida by RUBI Tools USA team.

RUB ACADEMY

LET'S BUILD BETTER PLACES TOGETHER!

The RUBI Academy is a pioneering project designed to professionalize and promote the tiler's trade, aimed at present and future ceramics professionals.

With more than 70 years' experience in training and supporting ceramic tile installers, we bring together all our training activities in an inclusive and accessible space: the RUBI Academy.

The RUBI Academy promotes learning opportunities through a wide range of international training events, webinars, downloadable tutorials and audio-visual content available on our website.

In addition to these training actions, the RUBI Academy supports initiatives such as the "RUBI Scholarship", which promotes specialization in tile installation among young students and collaborates in training events aimed at women in the construction industry or unemployed people who are continuing their training.

The main base of the RUBI Academy is located in our facilities in Santa Oliva, where it has a physical space dedicated to training. It has a classroom for theory classes and another space with more than 580 square metres for practical training.

In this way, the RUBI Academy is consolidated as an accessible and quality training space, which also serves as an in-person and virtual meeting point for professionals in the sector. We value and raise the profile of the tiler's trade, bringing it closer to people and acknowledging the important role of ceramic tile installers in the construction industry.



4

FOLLOW US ON OUR YOUTUBE CHANNEL TO SEE ALL THE TRAINING VIDEOS







time ?



At RUBI, innovation and quality are fundamental pillars in everything we do: from the conception of the design, through the production phase, and finally reflected in our products. We are proud to offer solutions that enable the tiling professional to carry out their work with creativity and good attention to detail, obtaining optimum results of the highest quality.

TECHNOLOGICAL LEADERSHIP




Patented products







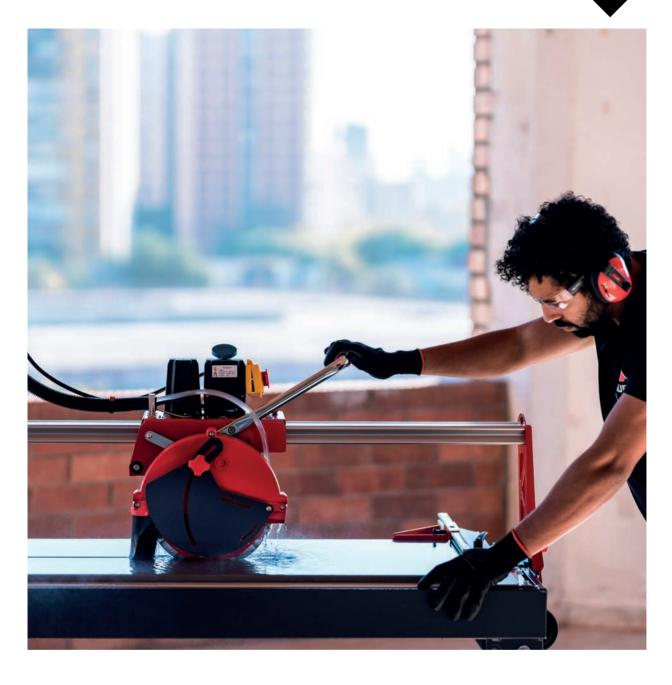

INNOVATION

We are constantly researching and developing new solutions based on the evolution of market and technology trends, our own experience and ongoing conversations with end users, our partners and other professionals.

QUALITY

We only use materials of the highest quality and we work in compliance with strict design and manufacturing standards in order to offer tools with the performance levels that our customers expect.

GUARANTEE

We strive to offer greater durability in our products and a peace of mind that comes from our long track record, also backed up by a customer support service and constant communication with the same global nature.

SOLUTIONS

Understanding and helping to shape our industry for generations has allowed us to create a wide range of tools that provide excellence and efficiency in the cutting and laying of tiles.



QUICK HEIGHT ADJUSTMENT

Mounting in pre-set positions is done quickly and easily, providing maneuverability and versatility in the daily use of the scoring wheel.

SAFE AND PRECISE INSTALLATION

While turning the handle to secure the wheel definitively once positioned, the wheel remains stable and attached to the mechanism.

EFFICIENCY AND COMFORT

The handle design allows for easy insertion into the tool holder, improving efficiency and comfort during use.

VERTICAL SLOTS FOR CENTERING AND ALIGNMENT

The vertical slot design is intended to enhance centering and alignment of the assembly during maneuvers. Patented design.


BRAND PROTECTION SYSTEM

The system prevents the use of unauthorized wheel handles, protecting our brand and ensuring exclusive use of our cutting wheels.

"SLS" 4TH GENERATION SCORING WHEELS



COMPATIBILITY TABLE

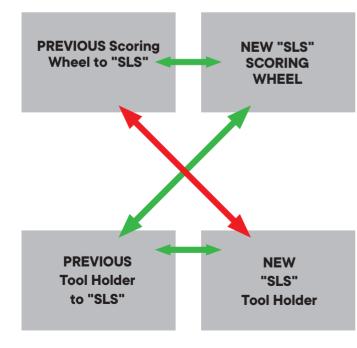

THE NEW "SLS" SCORING WHEELS ARE COMPATIBLE WITH ALL CUTTERS

About RUBI Group

RLB

The new SLS scoring wheels are compatible with both cutters that feature the new SLS-marked tool holder and cutters with the previous tool holder.


SCORING WHEELS PREVIOUS TO THE NEW "SLS" VERSION ARE NOT COMPATIBLE WITH CUTTERS FEATURING THE "SLS" TOOL HOLDER

Unlike the new SLS scoring wheels, previous versions lose compatibility with the new manual cutters featuring the SLS marking.



PARTNERSHIP WITH CAS

RUBI & CAS work to offer professionals battery-powered tools for ceramic tile installation with total freedom of movement. CAS batteries are compatible with more than 35 brands and over 300 products, making it a low-cost, high-performance solution for tilers. From RUBI, we have created and launched 4 innovative and revolutionary products with this leading technology.

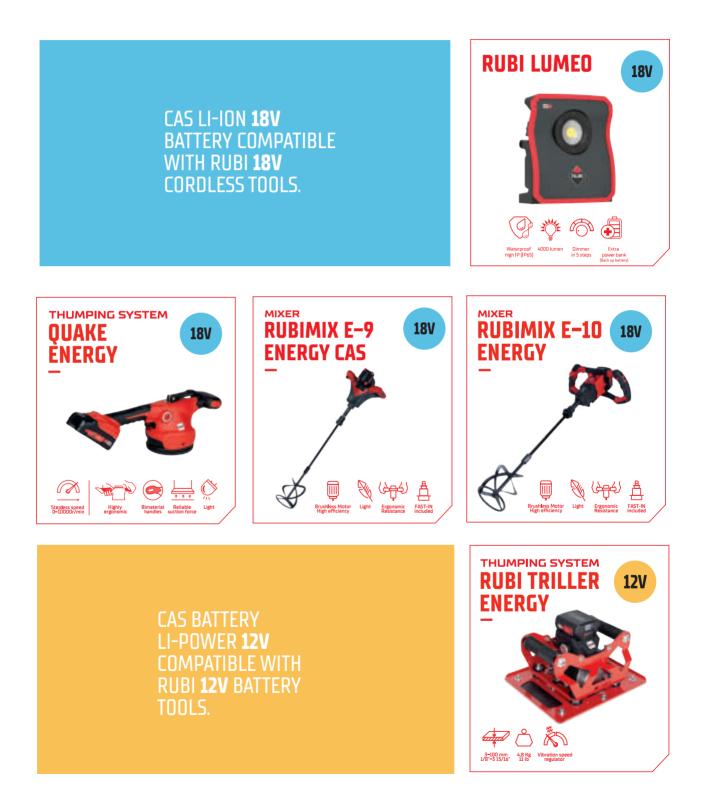

About RUBI Group

RUB

CAS BATTERIES

12/18V 2.0/4.0/5.2AH





Battery-powered tools for tile installers







brands



money



FREE

MOVEMENT

Save resources



facturer battery pack system



100% compatible


Cas battery compatibility



The charger is compatible with all batteries.





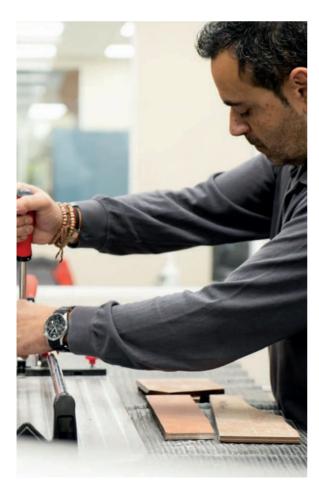

AFTER-SALES SERVICE

RUBI's after-sales team, together with our extensive network of official technical services, work daily to deal as efficiently as possible with incidents and any questions and needs our customers and professionals may have regarding the cutting and laying of ceramic tiles.

At RUBI Group, we lead the market with high and fast response rates, thus achieving exceptional customer satisfaction worldwide. We guarantee superior performance in our tools, providing a long-lasting and satisfying purchasing experience with impeccable customer service.

There are a number of ways for you to contact us:







warrantvusa@rubi.com

+1 305 715 9892

About RUBI Group

RLB

THE RUBI EXPERIENCE 5 STEPS TO EXCELLENCE

RUBI ensures quality, efficiency and creativity from start to finish at every stage of the tile installation process.

This basic signage across our entire product range helps the professional find the right tool for the task at hand, providing a clear and visual solution.

Our portfolio is now organized into these 5 categories, which have been defined taking into account our customers' testimonials about their own work processes, in the more than 120 countries where we operate.











NEW DC-250 SMART ADVANCE

True Intelligent Cutting

Service and a service and the service of the servic

THE TILE CUTTER THAT ADAPTS, PERFORMS AND PROTECTS.


Imagine a day in the life of a professional. Hours spent ensuring that every cut is precise, every edge smooth and every part perfectly adjusted. The job is demanding. Manual control is unpredictable, inconsistent and requires constant adjustments to suit materials and blade conditions. The **DC-250 SMART ADVANCE**, a tool designed to redefine how you cut. It's not just a cutter: it's your partner in precision.

When preparing tiles, the installer selects one of **four levels to choose between speed and finish.** With the intelligent automatic control, the machine instantly analyses the needs of the blade, type and thickness of the material. Unlike manual settings based on guesswork, the DC-250 SMART ADVANCE ensures that every cut is perfectly even, as if guided by an expert hand.

DC-250 SMART ADVANCE

UNIQUE TILE SAW THAT AUTOMATICALLY ADAPTS ITS PERFORMANCE TO THE NEEDED JOB. THE REAL SMART CUT SYSTEM FOR ASSISTED CUTS.

For cutting all kinds of ceramic and porcelain tiles and other materials, such as natural or synthetic stone with the use of the proper diamond blade.

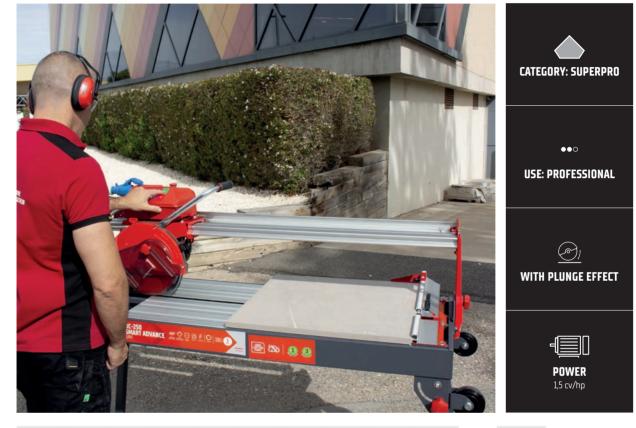

- · Two operating modes: Manual and Automatic. Different modes of Automatic cutting, some favoring speed while other modes focus on the quality of the finish of the cut.
- · Electronic Control to adapt engine power to the job needed. Uniform Cut with Perfect finish and no chipping.
- \cdot The machine adapts to the blade's needs and adjusts accordingly. Gives the Blades longer life and avoids glazing.
- · Integrated protection system in the electronic control that stops and protects the engine in case the blade glazes or gets stuck.
- The motor (1,1 kW) assembly is mounted on sliding bearings for maximum precision and reliability.
- Direct drive motor.
- Protection Bar for the driving belt.
- Foldable at 45° for miter.
- The plunge effect allows cutting height adjustment.
- Steel plate structure. Sturdy and maximum resistance to working conditions.
- The patented system ZERO DUST is used for safe exposure to breathable dust particles generated during the cut.
- New cooling system. This allows for an increase in refrigeration efficiency and reduced water dispersion. Includes blade and square alignment system with a regulation screw.
- Foldable legs with wheels for EASIER transportation and removable tables for easy CLEANING of the machine.
- \cdot Adjustable aluminum square (0° 60°) with a lateral stop for REPETITIVE cuts at 0° and 45°.
- Safety blade PROTECTOR for TURBO and SEGMENTED blades that meet EU & US standards.
- 50W water pump with flow control.





*The cutting capacities can vary depending on the head position, special flanges and disc diameter. **Enhanced visibility. T-shaped guide allows user to see the scoring wheel from the top with minimum angle.









DC-250 PYTHON

MOVING HEAD MACHINE, VERSATILITY AND PRECISION

For cutting porcelain stoneware.



- Motor assembly mounted on sliding bearings for maximum precision and reliability. Foldable at 45° for miter.
 Direct drive motor.
- \cdot Steel plate structure. Sturdy and maximum resistance to working conditions.
- Patented ZERO DUST system exclusive to RUBI and certified by TNO, for safe exposure because of reduction of respirable dust particles generated during cutting.
- C3 Python cooling system. New adjustable refrigeration system. Allows to adjust the point of water's fall depending on the material's thickness, getting a direct impact of the water in the cutting point. This allows to increase the refrigeration's efficiency and to reduce water dispersion.
- Foldable legs with wheels for an easier transportation and removable tables for easy cleaning of the machine.
- \cdot Adjustable aluminium square (0° 60°) with lateral stop for repetitive cuts at 0° and 45°.
- Safety protector for turbo and segmented blades.
- Blade cooling by water (50W water pump) with flow control.
- Includes Red Cobra 10" Blade. Supplied with cable.

	REF.	5	RPM	\longleftrightarrow	Þj	\bigotimes	x2	, iiiiii		$\mathbf{\tilde{O}}$		\bigcirc	×	-	H
DC-250 PYTHON 850 (39")	56911	1201/ 2011-	7700	33 5/8"	38 5/8"	27 3/8x27 3/8"	2 3/8/3	D 1 /0"		10"	53 7/8x23 1/4x51 5/8"	120.15 lb	153.22 lb	1	**1
DC-250 PYTHON 1200 (48")	56914	120V-60Hz	2/90	42 1/2"	47 5/8"	33 1/2X33 1/2"	1/2"	2 1/8" •	-	10"	63 3/4x32 1/4x51 5/8"	131.28 lb	165.35 lb	1	1

The cutting capacities can vary depending on the head position, special flanges and disc diameter.

리머리


DCX-250 XPERT

PROFESSIONAL MOVING HEAD MACHINE FOR WET CUTTING WITH PLUNGE EFFECT.

For occasional cutting of natural stone such as marble or granite.




- \cdot Reinforced aluminium chassis with innovative triple beam system and steel sides. Improves the stability and rigidity of the chassis.
- · Reinforced cutting guide for a better cut finish.
- \cdot C3-PYTHON increases cooling efficiency and reduces water dispersion.
- \cdot High performance plunge effect. Cutting height adjustment.
- Includes transport handle and off-road type reinforced wheels, which provide better transportability and handling of the machine.
- Steel double settling system for improved efficiency and water recovery.
- \cdot Angular measurement with a luminium square adjustable from 0° to 60° for repetitive cuts.
- Includes reinforced folding legs with folding-prevention system and quick lock.
- \cdot External and easy to remove water tank with 8 gal (30 L) capacity.
- $\boldsymbol{\cdot}$ Includes improved splash guard system with auto-sliding protective cover.
- Patented ZERO DUST system exclusive to RUBI certified by the TNO, for safe exposure thanks to the reduction of the breathable
- $\boldsymbol{\cdot}$ dust particles generated during the cut.
- \cdot Ergonomic bi-material handle for comfortable operation of the cutting head. Earth integrated into the chassis.
- Includes Red Cobra 10" Blade. Supplied with cable.



The cutting capacities can vary depending on the head position, special flanges and disc diameter.

MOBILE HEAD MACHINE FOR HIGH ACCURACY, IDEAL FOR MITER CUTS.

For wall tiles, floor tiles, porcelain tiles, marble, granite and other materials.

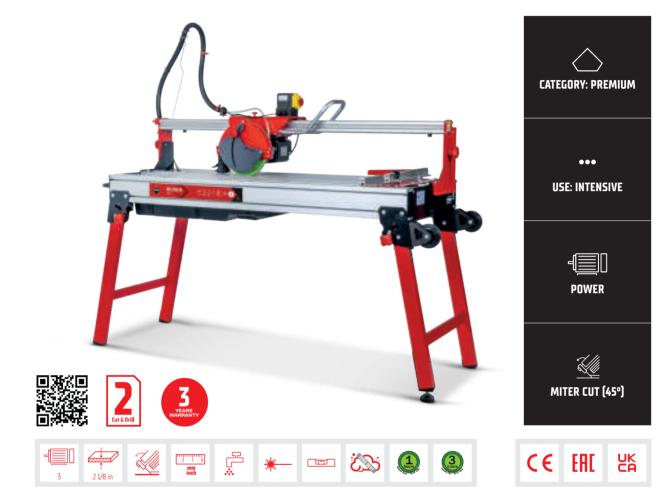

 \cdot Motor assembly mounted on sliding bearings for maximum precision and reliability. Perfect finishes.

· Folding legs with integrated castors: Pyramidal orientation to improve the stability and safety of the machine.

- · Wheels and handle included. Easy transport.
- Aluminium structure. Lighter cutter with maximum resistance to working conditions.
- · Equipped with protective safety system for segmented blades.
- With thermal security switch.
- Water pump cooling of blade with flow control valve.
- Diamond blade Ø 14" (350 mm) not included.
- Allows the use of a Ø 12" (300 mm) blade.
- Adjustable mobile head with plunge effect capability.
- Motor on top and belt transmission.
- With lateral stop for repetitive cuts.
- Aluminium working surface removable for easy cleaning.
- Removable water tank system.
- 2mW line laser. Circular level for easy field installation.
- Includes Vip Turbo Mesh 12" Blade. Supplied with cable.
- · Supplied with ZERO DUST system already assembled. Also provided with a second anti-splash standard protector

	REF.	5	RPM	\longleftrightarrow	\bigotimes		, <i>ditta</i>	•	\bigcirc		Ô	*		Ħ
DS-250-N 1300 (52")	52934	120V–60 Hz.inch.	7/00	51 "	36 3/4x36 3/4"	ח 1/0"		1"	101	78 3/4x33 7/8x50 "	212.74 lb	264.55 lb	1	**1
DS-250-N 1500 (60")	52944	120V–60 Hz.Inch.	3400	59 7/8"	42 3/8x42 3/8"	2 1/8"		1	10	86 5/8x33 7/8x50 "	220.46 lb	275.58 lb	Ţ	

Cutting capabilities may vary depending on the head position, special plates and disc diameter.



DX-350 N

MOBILE HEAD MACHINE WITH PLUNGE EFFECT FOR TOTAL VERSATILITY.

For all types of ceramic, porcelain tiles and building materials such as marble, granite, facade and fireproof bricks.



- · Motor assembly mounted on sliding bearings for maximum precision and reliability. Perfect finishes.
- · Folding legs with integrated castors: Pyramidal orientation to improve the stability and safety of the machine.
- Aluminium structure. Lighter cutter with maximum resistance to working conditions.
- · High performance plunge effect. Maximum cutting height.
- · Equipped with protective safety system for segmented blades.
- With thermal security switch.
- Water pump refrigeration of blade with flow control valve.
- Diamond blade Ø 14" (350 mm) not included.
- Allows the use of a Ø 12" (300 mm) blade.
- Adjustable mobile head with plunge effect capability.
- $\boldsymbol{\cdot}$ Motor on top and belt transmission.
- With lateral stop for repetitive cuts.
- · Aluminium working surface removable for easy cleaning.
- Removable water tank system.
- 2mW line laser.
- Circular level for easy field installation.
- Machine supplied without cable.
- Supplied with ZERO DUST system already assembled. Also provided with a second anti-splash standard protector

	REF.	5	RPM	\leftarrow	Þ	$\langle \rangle$	x2	, illitta	$\underline{\bigcirc}_l$	$\bigcirc \bigcirc$	$\mathbf{\tilde{O}}$		Ô		
DX-350 N 1300 (52")	52918	120V–60 Hz.Inch.	3400	52 1/8"	58 1/2"	41 3/8x41 3/8"	4 1/8/8 5/8"	2 1/2"	\checkmark	1"	11 3/4-13 3/4"	78 3/4x33 7/8x56 1/4"	220.46 lb	1	**1

Cutting capabilities may vary depending on the head position, special plates and disc diameter. Ref. 52919 [3F]: 4 CV/HP.



MOBILE HEAD CUTTER FOR RENOVATIONS AND LIGHT WORKS.

To cut ceramic and porcelain wall and floor tiles.



· Built-in foldable legs. Very easy to set up.

- · With wheels and handle for a more comfortable transport and handling.
- · External water tank, easy to handle and clean.
- · C³ System, improves blade's cleaning and cooling for a higher performance.
- \cdot Motor assembly mounted on sliding bearings and foldable for miter cuts.
- With lateral stop for repetitive cuts and adjustable square from 0 to 45°.
- Direct drive motor with thermal protector and reinforced chassis.
- Corrugated tube to protect power cable and water pipe.
- Front blade cooling diffuser with 5 positions depending on the hardness or the abrasion of the material.
- Bi-material handle, better ergonomics.
- With CEV-SUPERPRO diamond blade Ø 8" (200 mm) included. Supplied with cable.

	REF.	5	RPM	\longleftrightarrow	\bigotimes		, iiiiiii	\bigcirc	$\mathbf{\tilde{O}}$		Õ	_	
DU-200 EVO 650 (25")	55907	1201/ 7011- 1154	3200	25 5/8"	17 3/4x17 3/4"	1 7/8"	3/4"		0"	46 1/8x15 3/8x40 1/8"	49.60 lb	1	9
DU-200 EVO 850 (33")	54976	120V–60Hz. USA	3490	33 1/2"	23 5/8x23 5/8"	1.5/8"	5/4"	N	8"	53 1/2x15 3/8x40 1/8"	59.97 lb	1	6


The displayed product may not correspond exactly with the actual model.

RLB

DT-10IN MAX

TRANSPORTABLE ELECTRIC CUTTER WITH MITER EFFECT. GOOD FINISH.

For cutting stoneware, tiles, ceramics, refractories and other materials.

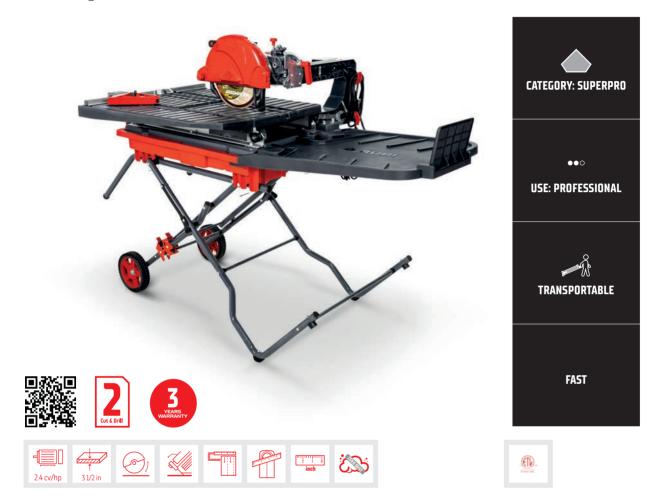


- Python cooling system combined with the Zero Dust system, keeps your work area clean by reducing the production of splashes.
- · It incorporates a tubular steel support with wheels and foldable, to transport the machine easily.
- With lateral stop for repetitive cuts with adjustment from 0° to 45° and magnetic support for for the blade key.
 Diamond blade for fast, smooth cuts with a long service life.
- · Diamond blade for last, smooth cuts with a long service life.
- Laser indicator to facilitate ceramic placement and obtain more precise cuts.
 Tilting cutting head adjusts for precise 22.5° and 45° bevel cuts.
- Thing cutting head adjusts for precise 22.5 and 45 bever cuts.
- Tank with level indication min. and max. Maximum capacity: 5 gal. (19 l).
- \cdot It incorporates an aluminum table with a rubber surface with a cutting capacity of 36" (90 cm).
- \cdot Replaceable table available (Ref #58907) that increases the cutting capacity to 48".
- Includes Arrowhead 10" Blade. Supplied with cable.

	REF.	5	RPM	\longleftrightarrow	\bigotimes		, ditta	$\bigcirc \bigcirc$	$\overline{\bigcirc}$		\bigcirc	-
DT-10IN MAX 120V 60HZ USA	26994	120V-60 Hz	4000	36 "	25 "	3 1/2"	1"	1"	10"	62 x68 1/8x48 5/8"	99.20 lb	1

The cutting capacities can vary depending on the head position, special flanges and disc diameter.

TRANSPORTABLE ELECTRIC CUTTER WITH MITER EFFECT. GOOD FINISH.

Recommended for cutting ceramic, porcelain, stone and glass tile.

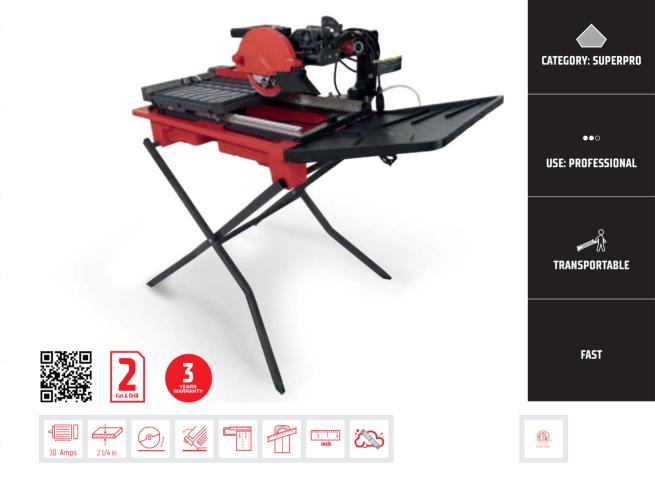

- \cdot Incorporates tubular steel support and foldable, to transport the machine easily.
- \cdot Universal motor with replaceable brushes.
- \cdot With lateral stop for repetitive cuts with adjustment from 0 ° to 45 °.
- \cdot Premium Laser-cut Blade: For fast, smooth cuts with long life.
- \cdot Tilting cutting head adjusts for precise 22.5 ° and 45 ° bevel cuts.
- $\boldsymbol{\cdot}$ Water tank with level indication min. and max.
- Maximum capacity: 4.27 gal / 16.2 L
- $\boldsymbol{\cdot}$ Aluminum main table. Rear water tray extensions in reinforced plastic.
- Includes 7" Blade. Supplied with cable.

	REF.	5	RPM	\longleftrightarrow	\bigotimes		<i>, iiiii</i> iii	$\bigoplus_{i \in \mathcal{O}}$	Ò	Ţ Ţ	\bigcirc	-
DT-7IN MAX 120V 60HZ USA	26993	120V-60 Hz	6000	24"	18"	2 1/4"	1"	5/8"	7"	48 1/8x23 1/4x44 5/8"	56 lb	1

The cutting capacities can vary depending on the head position, special flanges and disc diameter.

								•
	Name	Reference	Rip Cut	Diagonal	Blade	Arbor	Plunge cut	НР
	DU-200 EVO 650	54976	33''	24''	8''	1'' & 5/8''	Ν	1,1 HP
F	DU-200 EVO 850	54907	26''	18''	8"	1'' & 5/8''	N	1,1 HP
	DC-250 850 PYTHON	56911	38''	27''	10''	5/8"	Y	1,5 HP
	DC-250 1200 PYTHON	56914	48"	33''	10''	5/8''	Y	1,5 HP
	DCX-250 XPERT 1250	52962	49''	35''	10''	5/8''	Y	2 HP
	DCX-250 XPERT 1550	52972	61"	43''	10''	5/8''	Y	2 HP
	DC-250 SMART ADVANCE	53910	48''	33''	10''	-	Y	1,5 HP
	DX-350 N 1300	52918	58''	41''	12-14''	1''	Y	3 HP
	DS-250 N 1300	52934	52''	37''	10''	1''	Ν	3 HP
EA	DS-250 N 1500	52944	60''	42''	10''	1''	Ν	3 HP
*	DT-7IN MAX	26993	24"	18"	7"	5/8"	Y	10 Amps
*	DT-10IN MAX	26994	36''	25''	10''	5/8"	Y	15 Amps



•









Electric Cutters

LATERAL STOP FOR DC/DCX/DS/DX

• Facilitates positioning of the tile, while reducing the percentage of errors.

	REF.	
LATERAL STOP FOR DC/DCX/DS/DX	54822	1



TILE FIXER DV/DC/DCX/DS/DX

Allows the fixing of the tile during cutting, thus avoiding sudden movements.
Accessory adaptable to DV,DC,DS and DX series (up to 2009).

	REF.	(<u> </u>
TILE FIXER DV/DC/DCX/DS/DX	51916	1

CATEGORY: Superpro

10 0

TABLE EXTENSION

- Increases work surface for large format tiles. 23 5/8"(600x230mm).
- Maximum weight: 22Lb, (10kg).
- · Available in several models.

	REF.	<u> </u>
TABLE EXTENSION DV/DC/DCX/DS/DX	57941	1



ROLLER TABLE EXTENSION

- With rollers to simplify movement of the tiles.
- With adjustable foldable legs.
- Work surface 26 9/16"x22 5/8" (675x575mm) and maximum weight 154lb (70kg).
- Installation on both sides of the machine.

	REF.	=
ROLLER TABLE EXTENSION DU/DC/DCX/DS/DX (FROM 2013)	51914	1



48" EXTENDABLE TABLE DT-10IN MAX

- For better grip of large tiles with a cutting capacity of up to 48" (120 cm).
- Exclusive for DT –250 MAX (Ref. 26994).
- Extendable legs included to prevent tipping of the support.
- $\boldsymbol{\cdot}$ Main table manufactured in aluminium with a rubber layer.
- Guides manufactured in extruded aluminium with reinforcing cross-bars.

	REF.	- -
48" EXTENDABLE TABLE DT-10IN MAX	58907	1



ADJUSTABLE LENGTH LATERAL STOP DC/DCX/DS/DX

- For fixing large format tiles.
- · Adjustable to the maximum length of electric cutter.
- Tile is held laterally thus avoiding any movement.

SET OF FLANGES FOR MITRING CUTS.

To reduce saw flex in miter cuts.
Available in several models.
Flange for reinforced saws.

• Especially suitable for blocking and execution of repetitive miter.

		REF.	H
A	ADJUSTABLE LENGTH LATERAL STOP DC/DCX/DS/DX	54844	1



REF. P SET OF FLANGES 0184MM DX-350 51915 SET OF FLANGES 0130MM DV/DC/DCX/DX-250 57991 SET OF FLANGES FOR MITRING CUTS. 58906

0

Diamond blades

· DRY & WET CUT.

RUBI





CATEGORY: PREMIUM

HARD MATERIALS DIAMOND BLADE - BADGER MESH

- $\boldsymbol{\cdot}$ For cutting all type of hard materials as granite, slate, natural stone, quartz
- conglomerate, rustic stoneware, clinker, refractory, and all kind of porcelain tiles.
 This blade is a robust blade for heavy duty jobs and during cutting to counter any
- type of overheating, this blade has two ways for cooling. • 5/8" ring adapter included.

	REF.	Ò	$\bigoplus_{i \in \mathcal{O}}$	\bigcirc	() ,	-
BADGER MESH BLADE WET/DRY 4" USA	34900	4"				
BADGER MESH BLADE WET/DRY 4 1/2" USA	34901	4 1/2"	5/8" & 7/8"	1/16"	3/8"	1
BADGER MESH BLADE WET/DRY 5" USA	34902	5"				



CATEGORY: PREMIUM

EXTRA LONG LIFE

VIP TURBO MESH DRY

- Recommended blade for cutting hard materials such as granite, rustic tiles, clinker, refractory, slate and porcelain tile.
- The specific design of the diamond band offers greater speed of cutting harder materials without sacrificing finish quality.
- 5/8" ring adapter included.
- Thicker center to avoid vibrations and wobbling.

	REF.	\bigcirc	()	\bigcirc	\bigcirc	
VIP BLADE MINI 3 1/4" USA	32952	3 1/4"			3/8"	1
4" VIP PREMIUIM DIAMOND BLADE (DRY)	31926	4"	F /0" C 7 /0"	1/1/1		
4 1/2" VIP PREMIUM DIAMOND BLADE (DRY)	31927	4 1/2"	5/8" & 7/8"	1/16"		
5" VIP PREMIUM DIAMOND BLADE (DRY)	31949	5"				



CATEGORY: PREMIUM

EXTRA LONG LIFE

VIP TURBO MESH WET

- Recommended blade for cutting hard materials such as granite, rustic tiles, clinker, refractory, slate and porcelain tile.
- The specific design of the diamond band offers greater speed of cutting harder materials without sacrificing finish quality.
- 5/8" ring adapter included.
- Thicker center to avoid vibrations and wobbling.

	REF.	Ò	$\bigcirc \bigcirc$	Ŷ	Ŷ	<u>-</u>						
7" VIP PREMIUM DIAMOND BLADE (WET)	31929	7 "	5/8" & 7/8"	5/8" & 7/8"	5/8" & 7/8"	5/8" & 7/8"	5/8" & 7/8"					
8" VIP PREMIUM DIAMOND BLADE (WET)	31940	8"						1/1/1				
10" VIP PREMIUM DIAMOND BLADE (WET)	31941	10"		1/16"	3/8"	1						
12" VIP PREMIUM DIAMOND BLADE (WET)	31946	12 "	1"									
14" VIP PREMIUM DIAMOND BLADE (WET)	31947	14"] ⊥	1/8"								

 \odot



CATEGORY: PREMIUM

RED COBRA DRY

- Recommended blade to cut Porcelain, Ceramic, Marble, Granite, Natural Stone.
- 5/8" ring adapter included.

	REF.	$\mathbf{\tilde{O}}$	$\bigcirc \bigcirc$	Ŷ	\bigcirc	_
4" RED COBRA PREMIUM DIAMOND BLADE (DRY)	31950	4"	5/8" & 7/8"	1/16" 1/4	1/4"	
4 1/2" RED COBRA PREMIUM DIAMOND BLADE (DRY)	31951	4 1/2"	J/0 & //0	1/10	1/4	1



CATEGORY: PREMIUM

RED COBRA WET

- Recommended blade to cut Porcelain, Ceramic, Glass, Marble, Granite, Natural Stone.
- 5/8" ring adapter included.
- Thicker center to avoid vibrations and wobbling.

	REF.	\bigcirc		\bigcirc	\bigcirc	<u>_</u>	
7" RED COBRA PREMIUM DIAMOND BLADE (WET)	31960	7"	5/8" & 7/8"		E (17)		
8" RED COBRA BLADE USA- WET	30998	8"		1/16"	5/16"	1	
10" RED COBRA PREMIUM DIAMOND BLADE (WET)	31961	10"	5/8" & 1"		7/01		
RED COBRA BLADE WET 12" USA	30999	12"	1"	1/8"	1/8"	3/8"	



CATEGORY: PREMIUM

THICKER PREMIUM DIAMOND BLADE

- For cutting all types of ceramic, porcelain and natural stone materials.
- \cdot For cutting thicknesses between 20mm (3/4") and 35mm (1–3/8").
- Joint by laser welding.
- Extra-long life.
- Suitable for use on cutting tables and cut-off machines that incorporate guard systems in compliance with the standard for use of segmented blades.
- Special bonded alloy that provides a good finish with a very fast cutting speed.

	REF.	Ò	$\bigoplus_{i \in \mathcal{O}}$	(\mathbf{r})	Ç	<u>-</u>
10" THICKER BLADE USA - WET	32962	10	5/8" & 1"	1/16"	7/0"	
14" THICKER BLADE USA- WET	32964	14"	1"	1/8"	3/8"	Ţ



CATEGORY: PREMIUM

ARROWHEAD TURBO

- Recommended disc to cut fine porcelain tiles.
- Hight Tech. High speed on straight cuts on porcelain tiles.
- Only for straight cut, not recommended for miter cuts.

	REF.	$\mathbf{\tilde{O}}$	00+)	Ŷ	Ŷ	
4 1/2" ARROWHEAD PREMIUM DIAMOND BLADE (DRY)	31916	4 1/2"	5/8" & 7/8"	1/16"	5/16"	
7" ARROWHEAD TURBO BLADE USA - WET/DRY	30985	7"	0 € //0		1/1/1	1
ARROWHEAD TURBO BLADE WET 10" USA	30994	10"	5/8" & 1"		1/16"	

ARRDWHEAL C

CATEGORY: PREMIUM

ARROWHEAD J-SLOT

- Recommended disc to cut fine porcelain tiles.
- · Hight Tech. High speed on straight cuts on porcelain tiles.
- Only for straight cut, not recommended for miter cuts.

	REF.	\bigcirc	\bigcirc	\odot	\bigcirc	
7" ARROWHEAD PREMIUM DIAMOND BLADE (WET)	31901	7"	5/8"	1/1/ "	5/16"	
10" ARROWHEAD PREMIUM DIAMOND BLADE (WET)	31900	10"	5/6	1/16"	3/8"	



CATEGORY: PREMIUM

GLASS WET

- Recommended blade to cut Glass mosaic, glass blocks and other glass materials.
- High quality finish at low speed.

	REF.	$\overline{\bigcirc}$	(+0+)	\bigcirc	Ô				
7" GLASS PREMIUM DIAMOND BLADE (WET)	31994	7"	5/8" & 7/8"					1/4"	
8" GLASS PREMIUM DIAMOND BLADE (WET)	31998	8"	E /0" C 1"	1/16"	E /1 / II	1			
10" GLASS PREMIUM DIAMOND BLADE (WET)	31999	10"	5/8" & 1"		5/16"				



CATEGORY: SUPERPRO

CATEGORY: PRO



RUB

 \odot

PORCELAIN

• Recommended disc to cut fine porcelain tiles.

• Hight Tech. High speed on straight cuts on porcelain tiles.

	REF.	Ò	(+0+)	Ŷ	\odot	
4 1/2" PORCELAIN PRO DIAMOND BLADE (DRY)	31914	(1/2)	F /0" C 7 /0"		5/16"	
4 1/2" PORCELAIN SUPERPRO DIAMOND BLADE (DRY)	31913	4 1/2"	5/8" & 7/8"	1/16"	3/8"	1
10" PORCELAIN PRO DIAMOND BLADE (WET)	31907	10"	5/8"		5/16"	



CATEGORY: PRO

NATURAL STONE

- Recommended disc to cut fine Natural Stone.
- Hight Tech. High speed on straight cuts on Natural Stone.

	REF.	Ò	\bigcirc	Ç	(\mathbf{r})	<u>-</u>
7" NATURAL STONE PRO DIAMOND BLADE (WET)	31918	7"	F /01	1/1/1	5/16"	1
10" NATURAL STONE PRO DIAMOND BLADE (WET)	31917	10"	5/8"	1/16"	3/8"	



🔶 CATEGORY: PRO

GLASS

- Recommended disc to cut glass.
- Hight Tech. High speed on straight cuts on glasses.

	REF.	\bigcirc	$\bigcirc \bigcirc$	\odot		-
7" GLASS PRO DIAMOND BLADE (WET)	31920	7 "	5/8"	1/16"	5/16"	1
10" GLASS PRO DIAMOND BLADE (WET)	31919	10"	0/1	1/10	3/8"	1



CATEGORY: SUPERPRO

••• USE: PROFESSIONAL

CUT MASTER GUIDE

- To increase the stability and comfort when cutting. Improves the quality of the cut and the performance of the blade.
- The connection to the vacuum cleaner completely removes dust from the cutting zone. The silicone seal does not allow dust leaks.
- Fits all models of an angle grinder.
- $\boldsymbol{\cdot}$ It is not needed to remove the original blade protector.
- Wheels hold the weight of the angle grinder when cutting.
- It is much easier to guide the blade in a straight line.
- Vacuum cleaner connector 1.37" inches (Ø35 mm).
- Includes 1" inch rubber wheels (Ø30 mm) to not mark the tile, when executing the cut.

	REF.	
CUT MASTER GUIDE 90°	40922	1

GRINDING & POLISHING



🔶 CATEGORY: PRO

MATERIAL: PORCELAIN TILE

GRINDING BLADES

- VACUUM BRAZED embossed plate.
- For edges and surfaces grinding of natural stone, all kind of ceramic tiles and paint or resin coatings.
- For GRINDERS use.
- Maximum recommended speed: 15,300 RPM.
- Fine grinding finish (Ref.31974).
- · Coarse grinding finish (Ref.31979).

	REF.	$\overline{\bigcirc}$	$\bigcirc \bigcirc$	() 		RPM	-
VDF 100 FINE PRO	31974	41	7/01	1/01	7/01	15700	1
VDG 100 COARSE PRO	31979	4	7/8"	1/8"	7/8"	15300 max	Ţ



38

CATEGORY: SUPERPRO

NO VIBRATIONS

GOOD <u>FINISH</u>

Æ


ппм

CUTTING & GRINDING BLADES

- For cutting and grinding soft natural stone and ceramic tiles and synthetic materials.
- · For adjustment cuts and grinding on all types of porcelain and hard materials.
- Electroplated continous rim blade.
- Two-sided and reversible blade for a better performance.
- For grinders use. Connection: 5/8" thread.

DIAMOND BLADE CUT AND ROUGHING ECD 4-1/2"								
(115MM) 2 IN 1 SPRO USA	1976	4 1/2"	5 (0)			411	13300 max	
DIAMOND BLADE CUT AND ROUGHING ECD 5" (125mm) 2 in 1 spro USA	1977	5"	5/8"	1/16"	1/4"	T.,	12250 max	1



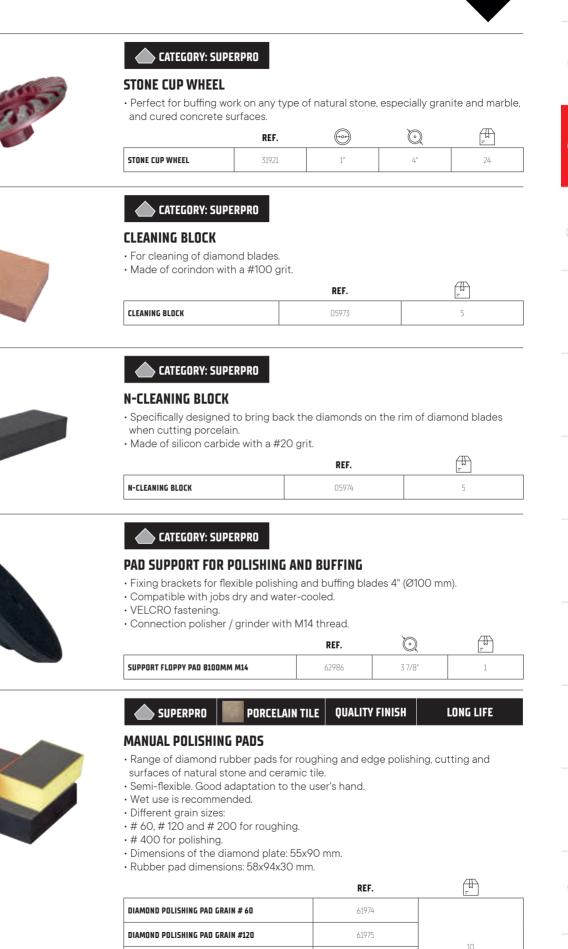

DIAMOND POLISHING PAD GRAIN #200

DIAMOND POLISHING PAD GRAIN #400

61976

61977



RUBI



CATEGORY: SUPERPRO

MATERIAL: NATURAL STONE QUALITY FINISH

DRY POLISHING DIAMOND PADS

- Resin polishing pads. 8 DRY polishing pads. Maximum operating speed: 3,000 rpm.
- Premium cooling technology on both versions (Dry & Wet).
- Will remove scratches from all Natural Stones.

	REF.	Ò	-
RESIN DRY POLISHING PAD 50 GRIT 4" - HQ	61911		
RESIN DRY POLISHING PAD 100 GRIT 4" - HQ	61913		
RESIN DRY POLISHING PAD 200 GRIT 4" - HQ	61915		
RESIN DRY POLISHING PAD 400 GRIT 4" - HQ	61931	4"	1
RESIN DRY POLISHING PAD 800 GRIT 4" - HQ	61932		
RESIN DRY POLISHING PAD 1500 GRIT 4" - HQ	61933		
RESIN DRY POLISHING PAD 3000 GRIT 4" - HQ	61940		

CATEGORY: SUPERPRO MATERIAL: NATURAL STONE

DNE QUALITY FINISH

QUALITY FINISH

DRY DIAMOND POLISHING PAD BUFF BL.

- Ø4" floppy disc for the final buffing, dry, of concrete, marble, granite and other ornamental natural stones. Get a natural and long-lasting shine
- Maximum operating speed: 3,000 rpm.

	REF.	Ò	-
RESIN DRY POLISHING PAD FINAL BUFF 4" (WHITE)	61973	4"	1

🗅 CATEGORY: SUPERPRO 🛛 📰 MATERIAL: NATURAL STONE 🔹 QUALITY FINISH

WET POLISHING DIAMOND PADS

- Range of floppy discs 4" (Ø100 mm) for polishing, with water, concrete, marble, granite and other ornamental natural stones.
- · It allows removing scratches and surface damage quickly and easily.
- Maximum operating speed: 4,500 rpm. Different granulometry.

	REF.	Ò	-
RESIN WET POLISHING PAD 50 GRIT 4" - HQ	61942		
RESIN WET POLISHING PAD 100 GRIT 4" - HQ	61945		
RESIN WET POLISHING PAD 200 GRIT 4" - HQ	61957		
RESIN WET POLISHING PAD 400 GRIT 4" - HQ	61958	4"	1
RESIN WET POLISHING PAD 800 GRIT 4" - HQ	61959		
RESIN WET POLISHING PAD 3000 GRIT 4" - HQ	61964		
RESIN WET POLISHING PAD 1500 GRIT 4" - HQ	61961		



CATEGORY: SUPERPRO

WET POLISHING DIAMOND PAD BUFF BL.

- \cdot 4" (Ø100 mm) floppy disc for the final buffing, with water, of concrete, marble,
- granite and other ornamental natural stones.
- \cdot Get a natural and long-lasting shine
- Maximum operating speed: 4,500 rpm.

	REF.	Ò	=
RESIN WET POLISHING PAD FINAL BUFF 4" (WHITE)	61971	4"	1

MITER PRO USA

PROFESSIONAL HIGH QUALITY MITER CUT

Accessory for mini angle grinders (04 1/2" / 05") to make miter cuts on the edge of tiles.





- Sliding it along the edge of the tile, thanks to the horizontal sliding surface and the bearings that allow a smooth advancement during cutting.
- By sliding the tile. The machine can be clamped in an inverted position on the SLAB* tables. The machine is held in place and the tile can be slid into position. Particularly suitable for repetitive cutting.
- PERFECT FINISHING, thanks to the precise cut adjustment function, the large support surface, and the bearings that allow perfect sliding.
- ZERO DUST System. The position of the suction device and its height adjustment allows most of the dust produced during cutting to be collected.
- $\boldsymbol{\cdot}$ Easy and quick to transport and install, no guides required.
- Types of anchor for grinder: M14 or 5/8"-11
- Specially designed for dry cutting. Allows wet cutting for angle grinders with IP65.
- Dust extractor connector with various diameters (1.4"/1.6"/1.9" inches).
- Safety band for fixing the grinder.
- \cdot Compatible with most angle grinders (Ø4 1/2" / Ø5") on the market.
- Includes 4 1/2" diamond blade.

	REF.	, iiiiiiiiiiiiiiiiiiiiiiiiiiiiiiiiiiii	\odot	Ò	
MITER PRO USA	52826	3/4/"	\checkmark	4 1/2/4 7/8"	1


*Compatible with the SLAB TABLE (both versions) and exclusively with the SLAB VERSATILE TABLE. **The pictures of this product might be slightly different from its final version.



PRO-EDGER BEVELLING AND MITERING ACCESSORY

PROFESSIONAL PORTABLE SYSTEM FOR INTENSIVE USE, ESPECIALLY DESIGNED FOR DRY BEVELLING AND MITERING PRINCIPALLY OF LARGE FORMAT TILES.

It can bevel and mitre porcelain, ceramic and any natural stone material of any length.

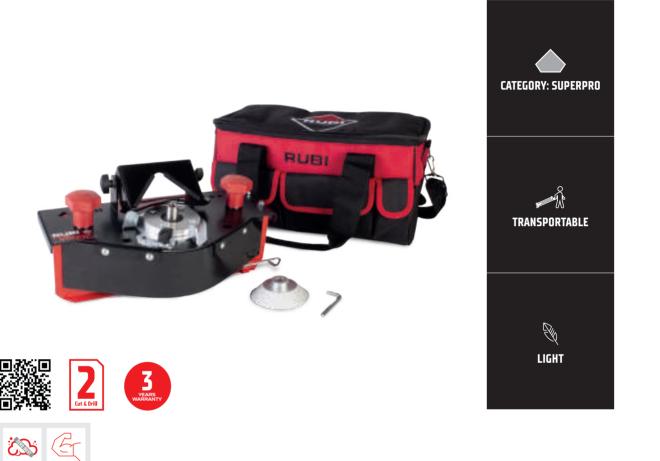

- \cdot It makes miter cuts at 45° up to a maximum thickness of 3/4" (20 mm), and with no thickness limitation for bevelling.
- Progressive bevelling and mitering at different depths to prolong the useful life of the grinding wheel and make bevelling easier for the user.
- \cdot Compatible with 115 & 125mm angle grinders with cable or battery that are easily and safely fitted thanks to the joint made with an M14 threaded shaft and quick-fastening belt.
- · Sealed high-speed bearings, to prevent the ingress of dust generated during the bevelling or mitring.
- $\boldsymbol{\cdot}$ Highly wear-resistant white polyethylene slides.
- A vacuum cleaner can be easily fitted for dust extraction (ZERO-DUST).
- Quick and simple grinding wheel change.
- Chassis with carbon steel sheet.
- 45° x 3/4" grinding wheel included (ref. 16946).
- Fixing to angle grinder by means of a 5/8"-11" (Ref. 16901) and quick fastening belt.
- Progressive wear bevelling and mitring is adjustable by 3/8".
- A damp cloth is recommended for cleaning.
- Water is not necessary for use.
- · Includes a bag with pockets for tools as a gift.

	REF.			, dilla			Õ	×		
PRO-EDGER PORTABLE BEVELING USA	16901	\checkmark	∞"	3/4"	5/8"	14 x8 1/4x6 3/4"	9.03886 lb	9.9207 lb	1	24

MATERIAL: PORCELAIN TILE





CATEGORY: SUPERPRO 4

GOOD FINISH

RUB

FINE GRAIN PRO-EDGER BEVELING WHEEL

- Grinding wheel for bevelling.
- Diamond grits fixed by means of a vacuum brazing system.
- Recommended use between 9,000 12,000 rpm to achieve greater durability of the wheel.
- Round finish available on 5 and 10 mm radius.
- Internal diameter: 16.1 mm (M16 thread).
- For exclusive use with PRO-EDGER.

	REF.	\bigcirc	$\bigcirc \bigcirc \bigcirc$		RPM	<u>_</u>
R.5 FINE GRAIN PRO-EDGER BEVELING WHEEL	16957	2 5/8"	M16"	1/4"	12000	5
R.10 FINE GRAIN PRO-EDGER BEVELING WHEEL	16958	2 "	1110	3/8"	12000 max.	1

$\overline{\bigotimes}$	CATEGORY: SUPERPRO	MAT	'ERIAL: P	ORCELA	IN TILE	GOOD F	INISH
	 FINE GRAIN PRO-EDGER MITR Grinding wheel for mitring. Diamond grits fixed by means of Recommended use between 9,0 the wheel. 45° type tool with 1-2 mm edge. Internal diameter: 16.1 mm (M16 t For exclusive use with PRO-EDG 	a vacuum 00 – 12,0 hread).	n brazinę			ater durabil	lity of
		REF.	Ò	(+0+)	: 	RPM	
	45X20 FINE GRAIN PRO-EDGER MITRING WHEE	16946	3 3/4"		3/4"		
	45X15 FINE GRAIN PRO-EDGER MITRING WHEEL	. 16985	3 1/4"	M16"	5/8"	12000 max.	5

\bigotimes	CATEGORY: SUPERPRO		MATERIAL	: PORCE	LAIN TIL	E	FAST
	TURBO TWIST COARSE GR/	IN PRO-EI	DGER MI	TRING	WHEE	L	
	 Grinding wheel for mitring. Diamond grits fixed by mean Recommended use between the wheel. The TURBO TWIST model ca as its grooved design can ch Internal diameter: 16.1 mm (M For exclusive use with PRO-fit 	9,000 – 12, n be used fo p the tile pr 16 thread).	000 rpm or grindin	to achi	eve grea		,
		REF.	$\overline{\bigcirc}$	()		RPM	
	45X15 TURBO TWIST COARSE GRAIN PRO- MITPING WHEEL	EDGER 16984	3 1/4"	M16"	5/8"	12000 max.	5

MITRING WHEEL



CRAFTING NEEDS HARA MORE INNOVATION

NEW TK TILE CUTTER

Meet the first asymmetric monoguide tile cutter worldwide.

We know you work hard and you probably workout. But you don't need two strong arms when you have:

- •3,307 lbs breaking power
- Breakage control
- Perfect visibility
- •Cut up to 7/8 inch
- \cdot Incredibly smooth cut
- Great stability
- ·Easy transport and folding

VISIONARIES SEE FURTHER

THE WORLD'S FIRST ASYMMETRICAL MONOGUIDE CUTTER FOR PROFESSIONALS WITH ALL THE INNOVATION AND QUALITY OF RUBI.

707

Working smart is about optimising processes, simplifying them and looking for new ways to improve results. It often means breaking with the status quo and looking beyond it.


VISIONARIES SEE FURTHER

TK

RUB

REVOLUTIONARY CUTTER WITH FORMIDABLE BREAKING POWER, WITH AN EXCEPTIONAL VISIBILITY OF THE SCORING LINE.

For intensive cutting of all types of ceramic and porcelain tiles.

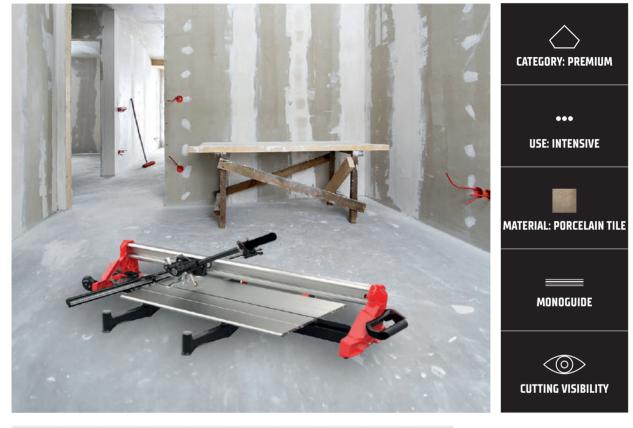

7/8 in	3306.9 lb				\bigwedge		PURE	- Kalip	<u>PATENTED</u>
--------	-----------	--	--	--	-------------	--	------	---------	-----------------

- PURE POWER. 3,307lbs (1500kg) maximum breaking force combined with a mechanism that allows to score and break with one hand.
- \cdot Offset guide. Perfect visibility of the scoring wheel. Same visibility as RUBI double guide cutters.
- Rotating square with magnet fixation. Removable aluminum support with a single-profile magnetic system for greater precision and to prevent movement or misalignment. It has two positions, one for work and one for transport.
- Robust and foldable. The tandem "guide chassis" gives the TK manual cutter greater robustness and always reduces the flexing of the assembly. The design of the machine in the folded position makes it easy to transport, both inside and outside the bag.
- We equipped this single-bar manual cutter with radial bearings for smoother and more accurate movement. Particularly suitable for heavy-duty applications.
- · Closed profile extruded aluminum guide with chromed steel raceway. Includes die-cast aluminum guide supports.
- \cdot Soft grip handle for improved ergonomics and comfort.
- For repeat cuts, long side stop swivels from 45° to 90°.
- \cdot Rubber wheels and handle for easy transport.

- $\boldsymbol{\cdot}$ Reinforced textile carrying case for transport, protection, and durability.
- \cdot Compatible with Secure Lock System (SLS) PLUS scoring wheels.
- \cdot Supplied with Ø5/16" (8mm) SILVER PLUS and Ø7/8" (22mm) EXTREME PLUS scoring wheels.











	REF.	\longleftrightarrow	\Leftrightarrow	territed by	ن سیس	Ô	-	
TK-850 INCH (34")	15976	34"	24x24"			54.01 lb		
TK-1020 INCH (40")	15977	40"	28x28"	1/0 7/0"	770/045	57.32 lb		
TK-1300 INCH (51")	15978	51"	36x36"	1/8-7/8"	3306.9 lb	71.65 lb		-
TK-1600 INCH (62")	15979	62 "	43x43"			74.96 Ib		

*some ceramic materials are thicker than half an inch (15 mm), due to their physical characteristics, possible internal stresses, or finishes, and are difficult to cut manually. It is recommended to make sample cuts to determine the compatibility of the product. **The pictures of this product might be slightly different to its final version.





TZ

RUB

MAXIMUM POWER, THE MOST ADVANCED MANUAL CUTTER IN THE MARKET.

For intensive cutting of all types of ceramic and porcelain tiles.



- \cdot Powerful breaking system (up to 3307 lb), operable with just one hand.
- · Accurate with soft slider movements.

48

- · Large cutting capacity, up to 13/16" (21mm) thickness. Ideal for large format tiles*.
- \cdot Robust with a foldable structure for high strength and easy transportation.
- $\boldsymbol{\cdot}$ Excellent performance breaking system: Clean cuts with soft motion.
- $\boldsymbol{\cdot}$ Robust chassis, guides and breaking system.
- Swivel square with central pivot for fast and accurate measurements in angle cutting.
- \cdot Adjustable lateral stop for repetitive cuts. Support base for excellent tile placement.
- $\boldsymbol{\cdot}$ Easy to transport: rubber wheels with bearings and handle.
- Interchangeable scoring wheels ranging from Ø 8mm –22mm.
- Includes Ø5/16" (8 mm) SILVER and 7/8" (22 mm) EXTREME scoring wheels. Reinforced textile bag for transport and protection.
- On models 1300/1550: The reinforced textile bag of these models includes 2 built-in wheels.

	REF.		\longleftrightarrow	\bigotimes	entres l	in the second	ô	-	
TZ-850 INCH TILE CUTTER (33")	17956		33 7/16	24x24"			49.4 lb		
TZ-1020 INCH TILE CUTTER (40")	17955		40 3/16"	27 9/16x27 9/16"		3307 lh	54.2 lb		
TZ-1300 INCH TILE CUTTER (51")	17957	\checkmark	51 3/16"	35 7/16x35 7/16"		חו זיטכר	66 lb	1	8
TZ-1550 INCH TILE CUTTER (61")	17958		61 1/16"	43 5/16x43 5/16"			73 lb		
TZ-1800 INCH TILE CUTTER (70")	17999		70 7/8"	47×47"		3307"	79,94 lb		


*Some materials with a thickness greater than 15 mm may be difficult to cut manually due to physical characteristics, internal tensions and/or finish. We recommend making sample cuts to determine product compatibility and alternatively suggest cutting these types of material using an electric tile cutter.

RUBI

TX-MAX

PROFESSIONAL MANUAL CUTTER WITH HIGH-PERFORMANCE MULTIPOINT BREAKER.

For professional cutting of all types of ceramic tile, ideal for porcelain stoneware and extruded stoneware.

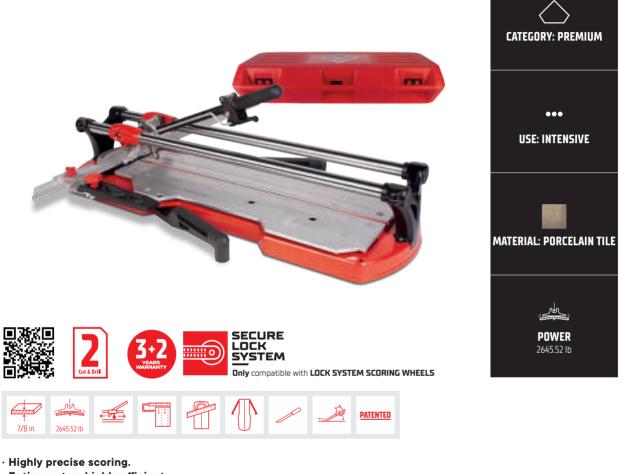

- · Entire system highly efficient.
- · Reinforced components. Heavy duty.
- \cdot High breaking power (1,200 kg) MASTER POWER. One-handed operation.
- $\boldsymbol{\cdot}$ Head with extra-long aluminium sliders with "self-lubricating" friction bearings.
- Portable breaker with aluminium pressure pad, equipped with plastic protector to avoid marking delicate surfaces. Better visibility of the scoring and cutting zone.
- The pressure pad is locked by a ratchet mechanism and is unlocked by the trigger, allowing one-handed scoring and breaking for faster use. Increases performance with both thin and thick materials.
- Injected-aluminium base, reinforced with a central rib, for increased strength.
- Floating tables and supplementary arms for large-size ceramic tile, increases cutting stability.
- Rotating square, with central pivot point and lateral end stop. Greater precision in angle cuts.
- Handle with soft grip for better ergonomics and comfort.
- Equipped with Ø5/16" (8 mm) SILVER and 7/8" (22 mm) EXTREME scoring wheels. Compatible with the entire plus line of scoring wheels.
- $\boldsymbol{\cdot}$ Includes a carrying case (the 1250 model is equipped with wheels to transport the machine).



HIT-PLUS

RUB

ROBUST AND ACCURATE MANUAL TILE CUTTER FOR LARGE FORMAT TILE.

For intensive cutting of ceramic tiles and porcelain tiles.



- · Set of sliders with ball bearings for greater ACCURACY and COMFORT during scoring.
- MAGNET system. The locking and unlocking of the platen to scratch and separate is done with one hand. GREATER speed of use and cutting precision.
- · Total vision of the scoring and cutting area thanks to the forward position of the wheel in front of the holder.
- \cdot Extruded aluminium base for a greater RIGIDITY and cutting CAPACITY.
- With HIGH performance moving breaker.
- Ground, chrome-plated solid steel guides with anti-corrosion treatment, and 1" (25 mm) diameter for greater torsional strength.
- With a square that includes a side stop for repetitive and 45° cuts.
- Equipped with 4 additional aluminium arms for working with large ceramic tiles.
- Moving guides stop for adjusting the cut to the tile dimension.
- Double tile support with accessory for cutting at 45°.
- $\boldsymbol{\cdot}$ Handle with soft grip for bett er ERGONOMICS and COMFORT.
- Wide range of scoring wheels adaptable to each material (6 mm- 1/4", 8 mm- 5/16", 10 mm 3/8", 18 mm 3/4", 22 mm 7/8" diameter). Includes Extreme 7/8" (22 mm) scoring wheel.
- Equipped with 2 wheel s and grip for bett er tool movement.
- \cdot The 63" (1600 mm) long versions include wheels for easier transport.

	REF.		\longleftrightarrow	\bigotimes		à caratación de la caración de la ca	Õ	ô		Ţ
HIT-1200 PLUS (48")	27900		47 1/4"	33 1/2x33 1/2"			48.28074 lb	56.44 Ib		20
HIT-1600 PLUS (62")	27909	_	62 "	39 3/8X39 3/8"	1/8-3/4"	1984.14 lb	48.5012 lb		1	24
HIT-1800 PLUS (70")	27916		70 7/8"	50 x50 "			60.097396 lb			-

RIB

HIT-N

ROBUST AND ACCURATE CUTTER FOR LARGE TILES.

For professional cutting of porcelain and ceramic tiles.



 \cdot With high performance moving breaker.

- \cdot Slider assembly with ball bearings for greater smoothness and comfort during scoring.
- \cdot Full view of the scoring and cutting area thanks to the forward position of the scoring wheel in front of the pressure pad.

\cdot Closed extruded aluminium structure base for greater rigidity and cutting capacity.

- Ground, chrome-plated solid steel guides with anti-corrosion treatment, and 3/4" (20 mm) diameter for greater torsional strength.
- \cdot Guides fixed with clamps for greater rigidity.
- \cdot With side stop for repetitive and 45° cuts.
- Equipped with 4 additional aluminium arms, for large-sized ceramic tiles.
- Handle with soft grip for bett er ergonomics and comfort.
- Wide range of scoring wheels adaptable to each material (6 mm- 1/4", 8 mm- 5/16", 10 mm 3/8", 18 mm 3/4", 22 mm 7/8" diameter).
- Includes Ø7/8" (22 mm) scoring wheel.

	REF.		\leftarrow	\bigotimes		in the second	\bigcirc	Ô	-	
HIT-850 N (33")	26963		33 1/2"	23 5/8x23 5/8"	1/0 5/0	17/7 / 0 15	24.69 lb		-	28
HIT-1200 N (47")	26961	_	47 1/4"	33 1/2x33 1/2"	1/8-5/8"	1763.68 lb	31.20 lb	- Ib	I	24

STURDIEST AND LIGHTEST CUTTER IN ITS CATEGORY.

For professional cutting of porcelain tiles and ceramic tiles.



- \cdot Enhanced visibility. The T-shaped guide allows the user to see the scoring wheel from the top with a minimum angle.
- \cdot Increased stability. Double Side Stop to for large format tiles.
- · Ultra-lightweight cutter. The machine is fully made in aluminum for enhanced transportability.
- \cdot Straightness regulation system.
- One hand-operated multipoint breaker with a MAGNETIC system that increases the speed and precision in cutting. 2094 lb (950 Kg) breaking power.
- Die-casting slider with 4 riveted double ball bearings capable of resisting a high load.
- Closed profile extruded aluminum guide with stainless steel raceway. Reduces both lateral and vertical bending improving cutting performance.
- Die-cast aluminum guide supports.
- Bi-material base Rubber.
- Side stop for repetitive cuts at 90° and 45°.
- Rubber wheels and handle for easy transport. Reinforced textile carrying case for transport, protection, and durability.
- Supplied with Ø7/8" (22 mm) EXTREME scoring wheel.
- RS models are supplied with reinforced fixed squares, with magnet fixation, and a 12-inch long side stop for straight repetitive cuts.

	REF.		\longleftrightarrow	$\langle \rangle$	entres l	in the second	\bigcirc	ô	-	
RCH - 24' (650)	27934		24"	19×19"			22.71 lb	26.01 lb		
RCH - 36' (920)	27931	\checkmark	36"	27x27"	1/4-11/16"	2094.37 lb	34.83 lb	38.58 lb	-	-
RCH - 48' (1200)	27932		48"	34x34"			42.10786 lb	48.72 lb		

*The pictures of this product might be slightly different to its final version.

TR-MAGNET

SUITABLE FOR DIAGONAL CUTS WITH A REVOLVING SQUARE FOR HIGH ACCURACY.

Ideal for professional cutting of porcelain tiles and intensive cutting of ceramic tiles.



· Floating base with shock absorber for better tile breaking.

• Solid steel guides, 3/4" (20 mm), chrome-plated and rectified, with anti-corrosion treatment for increased torsional strength.

- Multipoint breaker 1764 Lb of power.
- · Heavy-duty metal arms.
- Handle reinforced with SOFT-GRIP.
- Lateral end stop for making repetitive cuts.
- $\boldsymbol{\cdot}$ Base extension for large sizes.
- Two-layer base with shock-absorbing effect.
- High-strength aluminium base.
- Interchangeable scoring wheels from 1/4" (6mm) to 7/8" (22 mm).
- With Ø 3/8" (10mm) SILVER and Ø 7/8" (22mm) EX TREME scoring wheels and carrying case included.

	REF.	\square	\longleftrightarrow	$\langle \rangle$	enter la contra	in the second	ô		
TR-600 MAGNET (24")	17907	Yes	23 5/8"	16 1/2x16 1/2"	1/8-5/8"		30.64 lb	2	18
TR-710 MAGNET (27")	17908	\checkmark	27 "	19 5/8x19 5/8"	1/0-0/0	1763.68 lb	34.17 lb	1	15



RUBI

FOR THE MOST DEMANDING TILING PROJECTS.

For professional cutting all types of ceramic and porcelain tiles.



- \cdot Quick speed system with magnet, ideal for one-handed use. Easy and fast to use.
- · Great visibility during scoring.
- · Reinforced structured elements. High breaking power.
- \cdot Aluminum base for robustness. Light and easy to transport.
- Solid 13/16" (20mm) steel guides. Chromed and rectified with anti-corrosion treatment for greater resistance to twisting.
- Multipoint breaker 1764 lb (800kg) power.
- Reinforced SOFT-GRIP handle.
- Lateral stop for repetitive cuts and 45 degrees square.
- Interchangeable scoring wheels ranging between Ø 1/4" 7/8" (6mm-22mm).
- Scoring wheel Ø 5/16" (8mm) ENDURE. included.
- Direct view of scoring and cutting line.
- 72/92 models:
- -Aluminum lateral support.

	REF.		\longleftrightarrow	$\langle \rangle$		i i i i i i i i i i i i i i i i i i i	Ô	Ô		Ē
SPEED-62 MAGNET WITH CASE [24"]	14988		24 3/8"	17 3/8x17 3/8"			17.64 lb	25.35 lb	2	24
SPEED-72 MAGNET WITH CASE [28"]	14989	√	28 3/8"	20 1/8x20 1/8"	1/8-5/8"	1763.68 lb	20.94 lb	29.98 lb	2	- 18
SPEED-92 MAGNET WITH CASE (36")	14990		36 1/4"	25 5/8x25 5/8"			26.46 lb	37.04 lb	1	10

RUBI

SPEED-N

THE MOST VERSATILE TILE CUTTER IN ITS RANGE.

For professional cutting of ceramic tiles and occasionally for porcelain tiles.



- \cdot Reinforced structured elements. High breaking power.
- \cdot Chromed and rectified steel guides, with anticorrosion treatment. Higher durability.
- \cdot Aluminum base for higher robustness.
- \cdot Light and easy to transport.
- \cdot With lateral stop for repetitive cuts and 45 degree squares.
- \cdot Interchangeable scoring wheels ranging between Ø 1/4" (6mm) t o Ø 3/8" (10mm).
- \cdot Scoring wheel Ø 5/16 (8 mm) SIL VER included.
- $\boldsymbol{\cdot}$ Direct vision of scoring and cutting line.
- 72/92 models;
- \cdot -Aluminum lateral support.

	REF.		\longleftrightarrow	\bigotimes		Õ	ô	-	Ē
SPEED-42 N WITH CASE (17")	14949		17"	12x12"		12 lb	13.23 lb		64
SPEED-62 N WITH CASE (24")	14985		24 3/8"	17 3/8x17 3/8"		15.43 lb	23.37 lb	2	24
SPEED-72 N WITH CASE (28")	14986	N N	28 3/8"	20 1/8x20 1/8"	1/8-9/16"	18.08 lb	27.56 lb		10
SPEED-92 N WITH CASE (36")	14987		36 1/4"	25 5/8x25 5/8"		24.25 lb	35.05 lb	1	18

TS-MAX

RUBI

AUTHENTIC & ORIGINAL: LIGHTWEIGHT AND FUNCTIONAL WITH HIGH PERFORMANCE BREAKER.

Ideal for professional cutting of porcelain tiles and intensive cutting of ceramic tiles.



 \cdot Progressive breaking system "SMART POWER" adapts to different material hardness.

- \cdot Wide base. Greater base surface for higher stability and cutting quality.
- · Reinforced components for heavy duty work. High durability.
- · Ergonomic handles. Maximum comfort.
- $\boldsymbol{\cdot}$ Bigger reinforced base for a higher comfort a nd better stability when cutting.
- Powerful single point breaker. Up to (1764 lb) 800 kg breaking pressure.
- Double guide for dir ect view of scoring/cutting line.
- $\boldsymbol{\cdot}$ Chromed steel guides, rectified and calibrated, with anti-rust treatment.
- \cdot Lateral stop for repetitive straight and 45° cuts.
- \cdot Interchangeable scoring wheels ranging from Ø1/4" (6mm) to 7/8" (22 mm).

• Includes Ø 5/16" (8mm) ENDURE and Ø 3/8" (10 mm SIL VER) scoring wheels and a transport case with reinforced locks and hinges.

	REF.		\longleftrightarrow	\bigotimes	entre la contra	in the second	ô	=	
TS-43 MAX (GREY) (17")	18972		16 7/8"	11 3/4x11 3/4"			19.40 lb	19.40 lb	24
TS-66 MAX (GREY) (25")	18974	√	25 "	18 1/8x18 1/8"	1/4-5/8"	1763.68 lb	29.54 lb	1	20
TS-75 MAX (GREY) (30")	18975		29 1/2"	20 7/8x20 7/8"			33.29 lb		20


Manual Tile Cutting

RUB



LIGHT AND VERSATILE CUTTER.

For professional cutting of ceramic tiles.

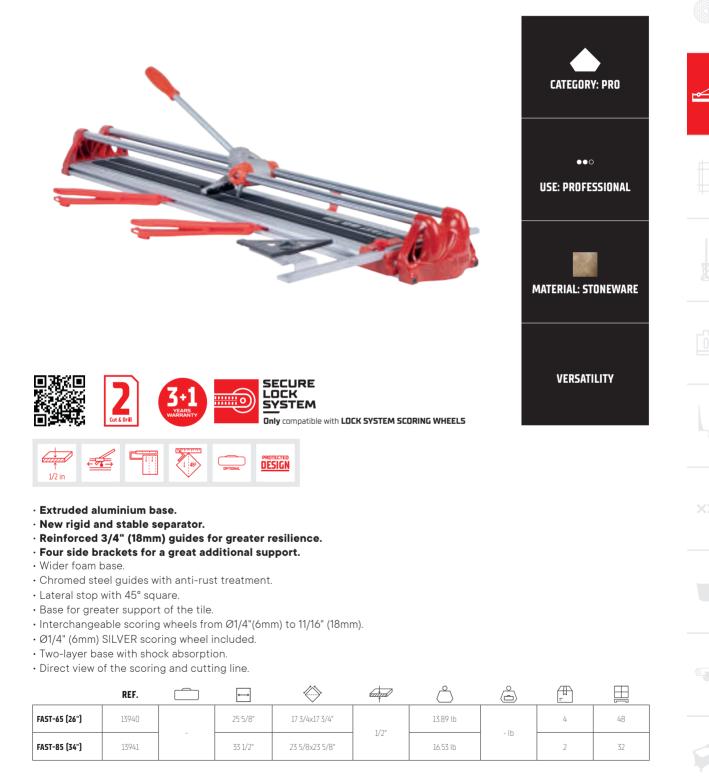

STAR PLATINUM

LIGHT AND VERSATILE MANUAL CUTTER.

Manual Tile Cutting

For cutting ceramic tiles.

RUBI



- \cdot Multipoint breaker with aluminium pressure pad and steel breaker bar for greater ROBUSTNESS and breaking POWER.
- \cdot Aluminium tool holder, more RIGID and STABLE for EASIER tile scoring.
- \cdot Cast aluminium base, LIGHT and STRONG with side extensions for large pieces.
- \cdot Cast ALUMINIUM guide supports for greater ROBUSTNESS.
- Dual guide for gr eater VISIBILITY of the scoring and cutting line.
- Solid, chromed, ground and calibrated steel guides with anti-corrosion treatment.
- Side stop with millimetre scale and 45° square.
- Interchangeable scoring wheels from Ø1/4"(6mm) to 3/8" (10mm).
- Ø 1/4" (6 mm) SILVER scoring wheel included.

	REF.	\longleftrightarrow	\bigotimes	Caning State	Č	ô	-	
STAR-51 PLATINUM (20")	15901	20 1/8"	14 1/8X14 1/8"	1/70	8.29 lb			-
STAR-63 PLATINUM (25")	15902	 24 3/4"	17 3/4X17 3/4"	1/2"	9.68 lb	– Ib	6	72

RUBI

SCORING WHEELS

				TILE	ТҮРЕ			
TILE SURFACE		AIC WALL BIII		I IC FLOOR a - BIIb	POR	CELAIN ^{Bla}		ARRY - Alib - Alii
Smooth polished	6 mm • ¼" 8 mm • 5‰" 10 mm • ¾" 18 mm • ¾"	Silver★ Silver/Endure Silver Silver			6 mm • ¼" 8 mm • 5‰" 10 mm • ¾" 18 mm • ¾"	Silver Silver/Endure* Silver Silver		
Smooth Matt	6 mm • ¼" 8 mm • 5%" 10 mm • ¾" 18 mm • ¾" 22 mm • ¾"	Silver* Silver/Endure Silver Silver Silver/Extreme	6 mm • ¼" 8 mm • 5‰" 10 mm • ¾" 18 mm • ¾" 22 mm • ¾"	Silver Silver/Endure Silver* Silver Silver/Extreme	6 mm • ¼" 8 mm • 5‰" 10 mm • ¾" 18 mm • ¾" 22 mm • ¾"	Silver Silver/Endure* Silver Silver Silver/Extreme	8 mm • 5‰" 10 mm • ¾" 18 mm • ¾" 22 mm • ¾"	Silver/Endure Silver Silver* Silver/Extreme
Textured	8 mm • ‰" 18 mm • ¾" 22 mm • ¾"	Silver/Endure* Silver Silver/Extreme	8 mm • ‰" 18 mm • ¾" 22 mm • ¾"	Silver/Endure Silver* Silver/Extreme	8 mm • ‰" 18 mm • ¾" 22 mm • ¾"	Silver/Endure Silver* Silver/Extreme	18 mm • ¾" 22 mm • ¾"	Silver * Extreme
Highly textured	8 mm • 5‰" 18 mm • ¾" 22 mm • ¾"	Endure Silver Extreme*	8 mm • 5‰" 18 mm • ¾" 22 mm • ¾"	Endure Silver Extreme*	8 mm • 5‰" 18 mm • ¾" 22 mm • ¾"	Endure Silver Extreme*	18 mm • ¾" 22 mm • %"	Silver Extreme *
Structured	8 mm • ∜₀" 18 mm • ¾" 22 mm • ¾"	Endure Silver Extreme*	8 mm • ∜6" 18 mm • ¾" 22 mm • ¾"	Endure Silver Extreme*	8 mm • ‰" 18 mm • ¾" 22 mm • ¾"	Endure Silver Extreme*	18 mm • ¾* 22 mm • ¾*	Silver Extreme*



SCORING WHEELS

							\bigcirc	PRO				△ 5 0F	PERPRO		PREM	IUM
							SIL	VER				END	URE	E	XTREM	1E
	Ľ	•	Refs:	1945 6	1902 8	1959 8	1946 10	1904	1960 14	1950 18	1905 18	1906 8	1903 8	1901 22	1907 22	1900 22
			Ø mm: Ø inch:	3 1⁄4	° 5/16	o ⁵∕16 PLUS	3%	3/8 PLUS	14 %16	3/4	3/4 PLUS	° 5⁄16	° 5∕16 PLUS	7/8	78 78	7/8 PLUS
🖒 PREMIUM	••• Intensive	TZ				O		o					O			o
PR	••• Int	TX MAX				O		O					o			o
		TP												o		
		TR MAGI	NET	0	o		O			o		o			o	
RO	al	HIT PLUS	S RS	o	o		o			o		O			o	
🛆 SUPERPRO	●●○ Professional	HIT PLUS	S	o	o		o			o		O			o	
\Diamond	•	HIT N		o	o		o			o		o			o	
		TS MAX		o	o		o			o		o			o	
		SPEED M	/AGNET	o	o		o			o		O			o	
		SPEED N	l	0	o		o					o				
		FAST		o	o		o					o			o	
🖒 PRO		STAR PL	ATINUM	0	0		o					O				
\Diamond	• ∘ ∘ Ocasion	STAR		0	o		o					o				
		PRACTIC	>	0	o		o					o				
		BASIC							O							

Included

PREMIUM SCORING WHEELS

\cdot PLUS SCORING WHEELS FOR TX-MAX, TK & TZ PROFESSIONAL CUTTERS.



RUB

SILVER SECURE LOCK SYSTEM	 8MM PLUS SILVER SCORING WHEN For ceramic wall, ceramic floor and potextured surfaces. Tungsten carbide scoring wheel of high Manec de geometria patentada, per a 	rcelain, ideal for gh resistance an	d durability.	
		REF.	-	
	8 MM PLUS SCORING WHEEL SILVER (5/16")	01959	10	3600
SECURE LOCK SYSTEM	 8MM PLUS SCORING WHEEL ENDU For sharp cutting in hard tiles Ideal for rough or structured surfaces Wheel made of tungsten carbide. Patented geometry shaft, for maximur Extra-long life. 	n precision and	minimum vibra	tion.
		REF.		
	8MM PLUS SCORING WHEEL ENDURE (05/16")	01903	10	-



10MM PLUS SILVER SCORING WHEEL (03/8")

- For ceramic wall, ceramic floor, porcelain and rustic ceramic floor, ideal for smooth and slightly textured surfaces.
- Tungsten carbide scoring wheel of high resistance and duration.
- Shaft made with a patented geometry for a maximum precision and minimum vibration.

		REF.	-	
10 <i>M</i>	IM PLUS SILVER SCORING WHEEL (03/8")	01904	10	3600



18MM PLUS SILVER SCORING WHEEL (03/4")

- For ceramic wall, ceramic floor, porcelain and rustic ceramic floor, ideal for Highly textured.
- Tungsten carbide scoring wheel of high resistance and duration.
- Shaft made with a patented geometry for a maximum precision and minimum vibration.

	REF.		
18MM PLUS SILVER SCORING WHEEL (03/4")	01905	10	3600



22MM SCORING WHEEL PLUS EXTREME(0 7/8")

- For sharp cuttings in hard ceramic and porcelain tiles.
- Tungsten carbide scoring wheel with a superficial titanium treatment.
- Mounted on bearing. Enhanced smooth user perception.
- Extra-long life.

	REF.	-	
22MM SCORING WHEEL PLUS EXTREME (0 7/8")	01900	10	-



~

SUPERPRO SCORING WHEELS

· FOR TS-MAX, TR-MAGNET, HIT, HIT-PLUS, HIT-PLUS RS & SPEED-MAGNET CUTTERS.



SECURE LOCK SYSTEM	 For wall tiles. Tungsten carbide scoring wheel of 	f high resistance a	nd durability.	
	 Patented model with new high tec 	•	,	recision a
	resistant to wear.	REF.		
	6MM SCORING WHEEL (01/4") SILVER	01945	10	4400
CATEGORY: PRO	SILVER 8MM SILVER SCORING WHEEL ([05/16"]		
	 For ceramic wall, ceramic floor, por and slightly textured surfaces. Tungsten carbide scoring wheel of Lock system patented model with precision and resistant to wear. 	f high resistance a	nd durability.	
		REF.	-	
	8MM SILVER SCORING WHEEL (05/16")	01902	10	4600
	Wheel made of tungsten carbide. Patented geometry shaft, for maxim Extra-long life.	REF.	<u>F</u>	ation.
	 Patented geometry shaft, for maxir 			
CATEGORY: PRO SECURE LOCK SYSTEM	Patented geometry shaft, for maximed for the second s	REF. 01906 . (Ø3/8") f high resistance a ology RUBI® alloy	nd durability.	
PRO PRO	Patented geometry shaft, for maxim Extra-long life. BMM SCORING WHEEL (05/16") ENDURE IOMM SILVER SCORING WHEEL For Floor tiles. Tungsten carbide scoring wheel of Handle made with new high techn resistant to wear.	REF. 01906 (03/8") f high resistance a ology RUBI® alloy REF.	nd durability.	cision and
	 Patented geometry shaft, for maxim Extra-long life. BMM SCORING WHEEL (05/16") ENDURE SILVER 10MM SILVER SCORING WHEEL For Floor tiles. Tungsten carbide scoring wheel of Handle made with new high techn 	REF. 01906 . (Ø3/8") f high resistance a ology RUBI® alloy	nd durability. ; maximum prec	ision and
	Patented geometry shaft, for maxim Extra-long life. BMM SCORING WHEEL (05/16") ENDURE IOMM SILVER SCORING WHEEL For Floor tiles. Tungsten carbide scoring wheel of Handle made with new high techn resistant to wear.	REF. 01906 . (Ø3/8") f high resistance a ology RUBI® alloy REF. 01946	nd durability.	cision and
EDCK SYSTEM	Patented geometry shaft, for maximents Extra-long life. BMM SCORING WHEEL (05/16") ENDURE IOMM SILVER SCORING WHEEL For Floor tiles. Tungsten carbide scoring wheel of Handle made with new high techning resistant to wear. IOMM SCORING WHEEL (03/8") SILVER IBMM SILVER SCORING WHEEL For rough and difficult to cut cerare Tungsten carbide scoring wheel of Patented shaft geometry; maximum	REF. 01906 . [Ø3/8"] f high resistance a ology RUBI® alloy REF. 01946 (Ø3/4") mic tiles. f high resistance a m precision and m	ID ID ID ID ID ID ID ID ID ID	cision and
SECURE SYSTEM	Patented geometry shaft, for maximents Extra-long life. BMM SCORING WHEEL (05/16") ENDURE IOMM SILVER SCORING WHEEL For Floor tiles. Tungsten carbide scoring wheel of Handle made with new high techning resistant to wear. IOMM SCORING WHEEL (03/8") SILVER IBMM SILVER SCORING WHEEL For rough and difficult to cut cerare Tungsten carbide scoring wheel of Patented shaft geometry; maximum	REF. 01906 . [Ø3/8"] f high resistance a ology RUBI® alloy REF. 01946 (Ø3/4") mic tiles. f high resistance a m precision and m	ID ID ID ID ID ID ID ID ID ID	cision and



		 For sharp cutting in hard tiles with Tungsten carbide scoring wheel wi Patented geometry shaft, for maxin Patented model for maximum preconstruction Extra-long life. 	th a superficial tita num precision and	anium treatmen I minimum vibra	
0			REF.		
		SCORING WHEEL 07/8"(22MM) EXTREME	01907	10	-
CATEGORY: PREMIUM	EXTREME	22MM SCORING WHEEL PLUS EX	(TREME (0 7/8")	TP/TQ/RCH/	SLAB CUTT
		For sharp cuttings in hard ceramic Tungsten Carbide scoring wheel w	ith a superficial Tit	anium treatmei	nt.



11100

 Mounted on bearing. Enhanced smooth user prec 	eption.	
• Extra-long life.		

	REF.	<u>-</u>	
22MM SCORING WHEEL PLUS EXTREME (Ø 7/8") TP/TQ/	01901	5	-
RCH/SLAB CUTTER	01/01	-	

SCORING WHEELS SETS

\cdot SETS OF SCORING WHEELS OF DIFFERENT DIAMETERS WITH BOX.



SCORING WHEELS KIT 2

- For TS-MAX, TR-MAGNET, TF-MAX & SPEED-MAGNET models, includes 1 scoring wheel of Ø1/4" (6mm), Ø5/16" (8mm), Ø3/8" (10mm), Ø3/4" (18mm) (2 units) SILVER.
- In plastic box with transparent cover.
- Supplied in blister.

	REF.	<u> </u>	
SCORING WHEELS KIT 2	01969	5	450




SLAB CUTTER G3

RUBI

MANUAL CUTTING SYSTEM WITH CONNECTABLE GUIDES.

For manual cutting of large porcelain tiles.

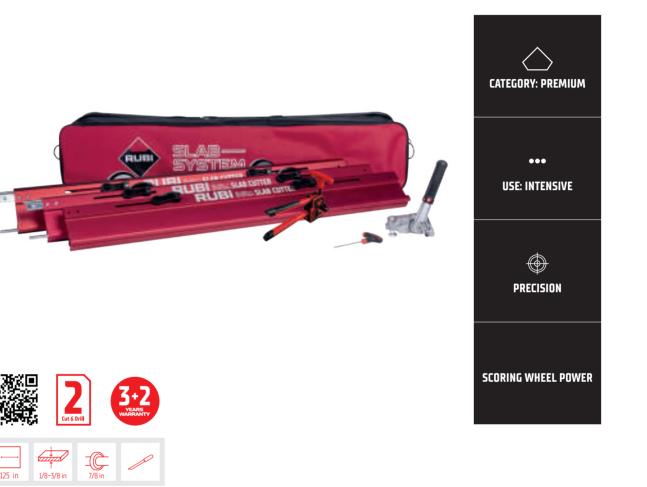

- System with movable suction cups integrated in the guides. Special grey rubber suction cups for rough surfaces that won't leave marks on the tile.
- \cdot Carriage with lever mechanism for perfect scoring. Extreme roller guide.
- \cdot Highly reinforced guides. Easily interconnected by means of an adjustable lever mechanism.
- \cdot Transport bag with padded handles and pockets for accessories.
- Breaking system by adjustable nippers with soft-grip handle, which facilitates and ensures progressive breaking of the tile,
- thus reducing the risk of cracking. 2-in-1 nippers and breaker.
- Ø 7/8" (22 mm) RUB I EXTREME roller guide made of Tungsten Carbide with Titanium Carbide treatment and bearings, to offer better scoring performance and quality.
- Each set contains: Three 44 1/8" (112 cm) guides, 1 marker carriage with 7/8" (22 mm) roller guide, 1 set of nippers and 6 suction cups.
- Transport bag with padded handles and pockets for accessories.

	REF.		¢		\bigcirc	○★	=	
SLAB CUTTER G3	16900	\checkmark	125 "	1/8-1/2"	24.2506 lb	37.4782 lb	1	9

The Slab Breaker Plus (ref. 18917) must be used for thicknesses from 3/8" (10 mm) to 9/16" (15 mm).

ANGLE GRINDER ACCESSORY G3

G3 ELECTRIC CUT

It allows a grinder to cut slab tiles with the G3 guides.



- \cdot Angle grinder position regulation. End-users can select and adjust their preferences.
- Multiple positions. Allows for straight cuts, miter cuts (45°), and side cuts at 90° for slots for ventilated facade anchors. The regulation on ventilated facade allows us to adapt to different tile thicknesses.
- \cdot Wet and dry cutting. With water connection and dust extractor adapter, it enables both dry and wet cutting.
- · Guide adjustment regulation. Improves the quality of the cut.
- Compatible with most angle grinders on the market.
- Compatible with 4.5" and 5" blades.
- Water inlet for the hose.
- Strap for the grinder accessory.
- Rubi 5" diamond blade included. The guide is not included.
- Maximum straight cut thickness (90°):
- 5" blade: 1" inch, (25 mm),
- 4.5" blade: 9/16" inches, (15 mm).
- Maximum miter cut thickness (45°):
- 5" blade: 3/4" inch, (20 mm),
- 4.5" blade: 9/16" inches, (15 mm).

	REF.	entre la constante de la const	$\mathbf{\tilde{Q}}$, <i>ditta</i>	
ANGLE GRINDER ACCESSORY G3	52959	3/4/"	4 1/2/4 7/8"	5/8/3/4"	1

*The pictures of this product might be slightly different to its final version.

SLIM CUTTER G2

RUB

HAND CUTTING SYSTEM WITH CONNECTABLE GUIDES.

For hand cutting of large porcelain tiles with thicknesses between 1/8" and 3/8" (3 and 10 mm).



- \cdot High-scoring power thanks to the new tilting carriage design and it s fixing on the reinforced guides.
- Maximum 14 3/16" (360 cm) cutting capacity (extendable) thanks to its connectable guides. Allows a 4 3/4" (120 cm) cut with a single guide.
- Excellent fixing of the guides on the tile by means of 3 natural rubber suction cups, suitable for rough surfaces, with double anchoring point.
- It prevents tile breakage by means of the progressive breaking system of the adjustable nippers with soft-grip handle. 2-in-1 nippers and breaker.
- Recommended thicknesses between 1/8" and 3/8" (3 10 mm).
- Specially designed for large tiles, it provides a perfect cut without chipping with a light and easy-to-store cutter.
- High durability of the Ø 7/8" (22 mm) RUB I EXTREME roller guide. Manufactured in tungsten carbide with titanium treatment and bearings, it offers better performance and high scoring quality.
- Easily transportable. It includes two practical reinforced transport bags with compartments, handles and a shoulder strap.
 These can be transported separately or together with the use of a simple connecting system.
- Each set contains: Two 61" (155 cm) guides, one 21 1/2" (65 cm) guide, 1 ma rker carriage with 7/8" (22 mm). r oller guide, 1 set of nippers, 3 suction cups, 1 Allen key and 2 transport bags.


	REF.		\longleftrightarrow		\bigcirc	=	
SLIM CUTTER G2	23999	\checkmark	141 3/4"	3/8"	22.71 lb	1	-

The Slab Breaker Plus (ref. 18917) must be used for thicknesses from 3/8" (10 mm) to 9/16" (15 mm).

TC-125 G2 CIRCULAR SAW KIT

THE LIGHT AND PRECISE LARGE FORMAT CUTTER

For cutting ceramic and porcelain tiles. Suitable for use with natural and synthetic stone. Especially suitable for large format tiles.

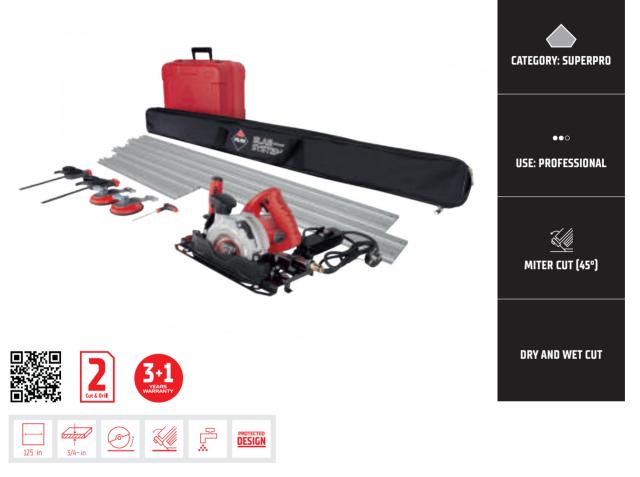

- \cdot Includes a set of suction cups suitable for all surfaces for fixing the guide to the part.
- \cdot Equipped with a carbon steel slide on adjustable double set stainless steel radial bearings.
- \cdot Double dust reduction/control system. Dry and wet cutting.
- \cdot Height-adjustable cutting head (saw effect), hinged from 0° to 45°. (miter). FAST adjustment system.
- More ergonomic. Additional BI-MATERIAL handle, mainly for mitre cuts.
- Compatible with discs of 5" (125 mm)or 4 –1/2" (115 mm) diameter. (Suitable for discs with reinforcement plate).
- \cdot Switch with SAFETY lock. Prevents UNINTENTIONAL start-up. Electrical cable with PRCD.
- Direct connection to vacuum cleaner. Includes adapter for other models and brands 17/16", 15/8" and 2" (37, 42 and 50 mm) diameter.
- Quick connection and regulating valve for hose (16 mm diameter). Rubber stopper for suction outlet. IMPROVES ergonomics during wet cutting.
- Cast aluminium disc protector with transparent polycarbonate cover with quick opening and closing system. FACILITATES disc change and MINIMISES the projection of particles and water.
- $\boldsymbol{\cdot}$ Tilting side guard for mitre cuts. REDUCES water splashing and IMPROVES dust suction.
- Each set contains: two 61" (155 cm) guides, one 25 9/16" (65 cm) guide, 1 T C-125 cutter, 1 Ø5" disc, 2 fixing s uction cups, 2 clamps, 2 spacers, 1 vacuum cleaner adapt er, 1 carry case and 1 carrying bag. FACILITATES transport and handling.

	REF.		5	RPM	W	\longleftrightarrow		, <i>ditta</i>	$\mathbf{\tilde{O}}$	() ()		ô	-	
TC-125 G2 USA	51977		110-130V 50-60Hz	11300	1250	∞"	3/4-"	1/2-3/4"	4 1/2-4 7/8"	7/8"	14 1/8x9 5/8x8 1/4"	22.05 lb	1	-
TC-125 G2 GUIDES	51949	v				125 "						29.76 lb	1	24

The kit is Ref.51977 + Ref.51949. It must be used with the SLIM SYSTEM G2 guides.

CUTTING

RUBI





CATEGORY: SUPERPRO

••• USE: OCCASIONAL

ACCESSORY FOR TC-125 G2 FREE CUT

Accessory for TC-125 G2.

- Allows TC-125 G2 do free and parallel cuts to the corner cuts. (without the need of guide).
- *The pictures of this product might be slightly different to its final version.

	REF.	Ò		, unna	_
ACCESSORY FOR TC-125 G2 FREE CUT	52828	4 1/2/4 7/8"	5/8/7/8"	3/8/1/2"	1



CATEGORY: SUPERPRO

SLIM CUTTER G2 SUPPLEMENT GUIDES

• Aluminum guides for the G2 system.

	REF.	- <u>+</u>
SLIM CUTTER G2 SUPPLEMENT GUIDE 65 CM.	52948	1
SLIM CUTTER G2 SUPPLEMENT GUIDE 155 CM.	51999	1

CATEGORY: PREMIUM

SLIM CUTTER G3 SUPPLEMENT GUIDE

- Extruded aluminum guide with an extra 44" inches (112 cm).
- · Includes two suction cups integrated into the guide.

	REF.	=
SLAB CUTTER G3 SUPPLEMENT GUIDE AND SUCTION CUPS	16908	1



CATEGORY: SUPERPRO

SLIM CUTTER G2 HEAD

- Tilting carriage with an ergonomic handle for the G2 cutting system.
- $\boldsymbol{\cdot}$ Improves the fixing on the guides.

	REF.	=
SLIM CUTTER G2 HEAD	27911	1



\bigcirc	CATEGORY: PREMIUM	
------------	-------------------	--

CUTTING HEIGHT



RUBI

SLAB BREAKER PLUS

- Auxiliary breaker for the cut of slim porcelain slabs or large tiles.
- To separate thicknesses of 1/4" up to 3/4" (6 mm up to 20 mm).
- Soft-grip handle for a better comfort and ergonomic.
- With width adjustment system, to achieve an equal, uniform and symmetric distribution of breaking forces when cutting narrow strips.
- Rubber pressure pad for greater control and more precise separation.

	REF.	territer of the second	-	
SLAB BREAKER PLUS	18917	1/4/3/4"	1	48

CUTTING HEIG

FAST

HT

SLAB BREAKER NIPPERS

CATEGORY: SUPERPR

- Nippers/breaker for large porcelain tiles of between 1/8" to 3/8" (3 to 10 mm) thick.
- Nippers with bi-material soft-grip handle with clip to keep the nippers closed.
- \cdot High breaking power for tiles from 1/8" to 3/8" (3 to 10 mm) thick.
- Reinforced nippers designed for greater comfort and durability.
- Can be used as nippers for thinner tiles and as a breaker if the thickness or hardness of the material requires it. 2-in-1 nippers and breaker.

	REF.	- <u>+</u>
SLAB BREAKER PLIERS	54918	1



CATEGORY: PRO	CUTTING HEI	GHT	ERGONOMIC
SLAB PLIERS			
 For separating tiles up to 0.70 scratched with a manual tile c Specially designed for large for Two-in-one pliers and separate *The pictures of this product 	utter. prmat tiles and porce cor.	elain slabs	i.
	REF.	(Æ

	REF.	territe and the second	- <u>-</u>
SLAB PLIERS	28916	3/4"	1




RUBI

SLAB TRANS HEAVY DUTY N

FULLY ADJUSTABLE FRAMEWORK FOR HANDLING LARGE CERAMIC/PORCELAIN/NATURAL STONE SLABS.

Especially suited for handling thicker pieces.

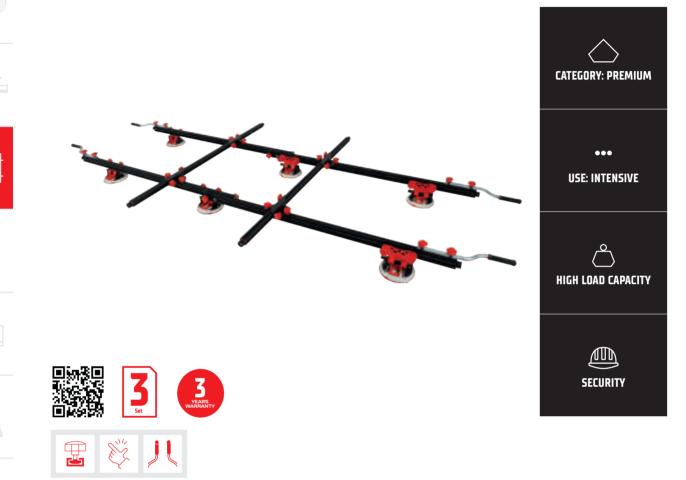

 \cdot Reinforced aluminium profile joined by a system of sliders. Greater structural strength.

- \cdot Includes 2 perpendicular aluminium guides, for greater stiffness.
- Equipped with four retractable and removable Soft-Grip handles to adapt to every situation during installation. Six light colored vacuum suction cups that does not leave marks on the tile. Increased load capacity.
- \cdot Fast and easy to assemble and disassemble. Easy fix system.
- Black anodized finish.
- Maximum load capacity: 375 lb (170 kg).
- Maximum handling size: 11' 1" x 5' 3" (360 x 160 cm).
- Unitary box with RUBI's flexography and full-colour label.


	REF.	, E E E E E E E E E E E E E E E E E E E	Õ	-	
SLAB TRANS HEAVY DUTY N	18982	149 5/8x66 7/8x9 3/8"	80.25 lb	1	-

Additional vacuum suction cups available can be attached to the system but it does not increase the maximum load capacity of 170 kg.

ERGO TILE TRANS

BEST ADAPTABILITY FOR LIGHTER JOBS.

For the transport and handling of large formats of porcelain slabs.

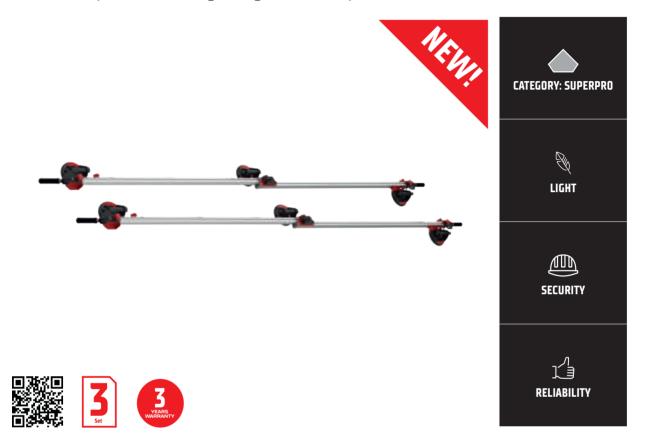

- High workpiece clamping force. Due to its 6 suction cups Ø160, which can be moved along the guide, it provides an excellent grip on the workpiece.
- Easy folding and unfolding. Smooth and easy sliding of the slides thanks to their interlocking shape and the runners between them. Easy fixing and fastening by means of locking levers (without knobs).
- Comfortable and secure holding: Thanks to the highly reinforced steel handles with anti-slip grip, which allow a better grip of the whole. The handles can be folded to allow support on the support blocks in the laying position.
- Each guide can be used separately.
- Possibility of adjusting the tile in height, if the suction cup is slightly inclined, by means of manual levellers.
- Suction cups with safety indicator. Each suction cup, has an indicator that warns in the event of loss of suction.
- Easy release of the piece using the button on the suction cups or the tab on the suction cup rubber.
- $\boldsymbol{\cdot}$ The cups are protected to prevent damage during transport.
- Maximum load capacity: 176 lbs (80 kg).

ACCESSORIES

• For workpieces with a maximum length of 10.49Ft (3.2m).

	REF.	\longleftrightarrow	\bigcirc	, € I	-	
ERGO TILE TRANS	28906	125 "	36.3759 lb	142 1/2x11 3/4x5 3/8"	1	-

*SUPPLEMENTARY CROSSBARS SLIM EASY TRANS/PLUS (ref. 18819). Increases the maximum load capacity to 264.5 lbs [120 kg].**The pictures of this product might be slightly different to its final version.




REF. 28910 SUPPLEMENTARY SUCTION CUP FOR ERGO TILE TRANS



SLAB TRANS MINI

FOR TRANSPORTING CERAMIC SHEETS AND LARGE-FORMAT TILES WITH A MAXIMUM RECOMMENDED SIZE OF 60X60" (150 X 150 CM).

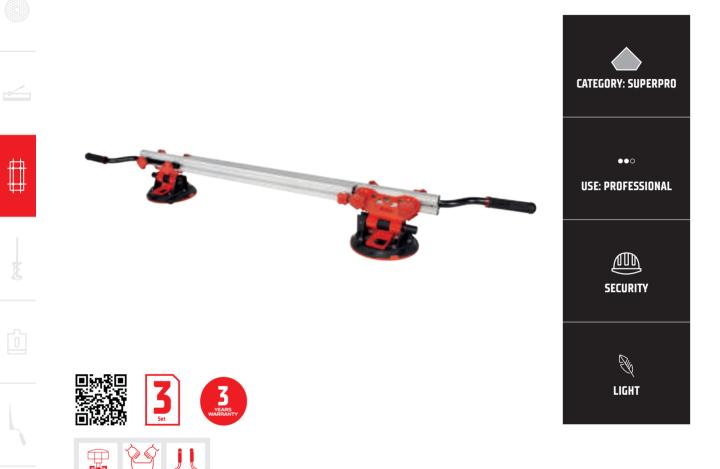

- · Ideal for medium formats. It adds less weight to the tile conveyor assembly when transporting medium-sized formats.
- Retractable aluminium guide. Allows us to handle and transport tiles between 39 3/8" (100 cm) and 82 11/16" (210 cm) in size. Especially recommended for formats of up to 59x59" (150 x 150 cm), more than 8 mm thick, used diagonally.
- Highly reinforced, adjustable and removable soft-grip handles. With an anti-twist and soft-grip system which ensures a better grip of the assembly.
- \cdot 2 interchangeable Ø8" (20 cm) suction cups, can be placed at any point on the guide.
- Suction cups with a safety indicator.
- Each suction cup, of 8" (20 cm) in diameter and with a high-load capacity, has an indicator that warns us in the event of a loss of suction.
- The suction cups have a protector to prevent damage during transport.
- With a maximum load capacity of 88 lb (40 kg) at their maximum length.
- Maximum load capacity: 121 lb (55 kg).


	REF.	Õ	$\langle \star \rangle$		=	
SLAB TRANS MINI	18983	18.29818 lb	24.69 lb	90 x10 1/4x7 1/8"	1	15

RUB

₿

SLAB TROLLEY

TRANSPORT AND HANDLING SYSTEM FOR LARGE-FORMAT SHEET TILES.

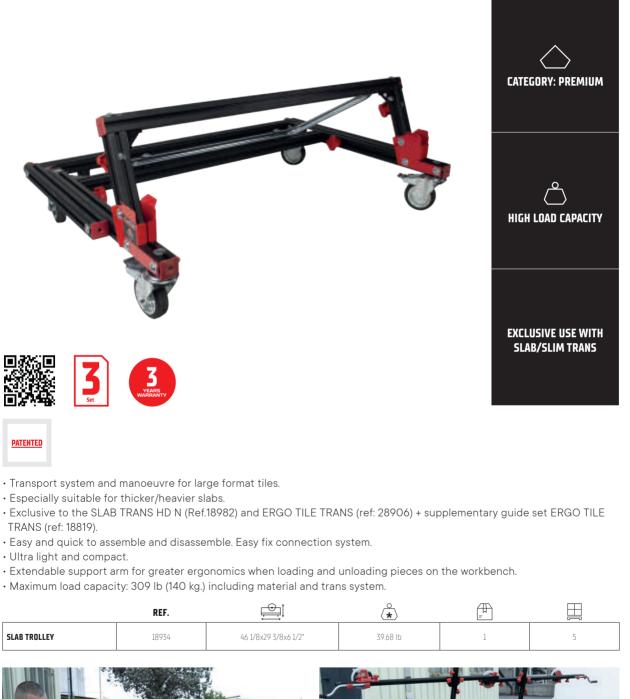





RHINO TROLLEY

TRANSPORT AND HANDLING SYSTEM FOR LARGE TILES.

Easy to transport due to its compact design.



- Very manageable with great stability thanks to its 4 swivel wheels (360°). It has a safety lock on the wheels to prevent undesirable movements.
- It can be transported on any type of surface, thanks to its large 160 mm diameter wheels.
- It comes with a 16-inch wide platform. It can transport several tiles at the same time of up to 1.5"-inch thickness.
- Maximum load capacity: 551 pounds
- Maximum transport dimensions: 71" x 47" x 1.5" inches (1800 x 1200 x 40 mm.)
- Rubber cover to protect the tiles.
- Compatible with the transporters.

	REF.		\bigcirc	-	
RHINO TROLLEY	28912	35 3/8x17 1/8x10 "	27.78 lb	1	-




RUB

SLAB TABLE VERSA-TILE

WORK BENCH FOR CUTTING AND HANDLING LARGE-FORMAT CERAMIC SHEETS.

Specifically designed for the SLAB range of tools.

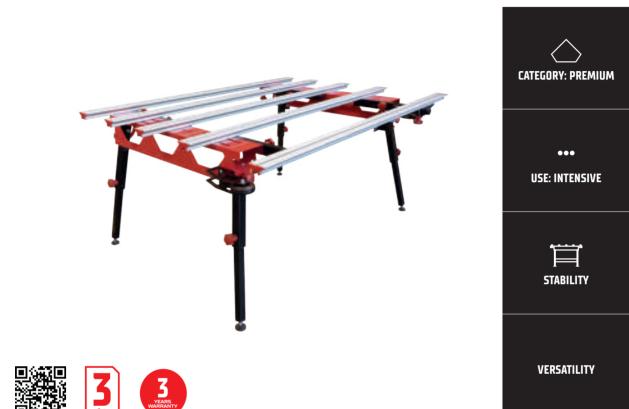

- Thanks to the shape of the legs and its structure, the table is very stable and sturdy even in its widest position. The adjustable feet ensure this stability, even on uneven floors.
- Dimensions in working position: The table is extendable from 43 3/10" to 59 5/8" (1100 to 1515 mm), which al lows you to handle the widest formats. Its length is 71" (1800 mm).
- Its folding legs and two s ide wheels make it easy to transport and store.
- Double working height: 2 7 9/16" and 33 1/6" (70 and 84 cm), which means it can be adapt ed to different needs, allowing all types of work to be carried out.
- Maximum load capacity: 573 lb (260 kg). Even the largest tiles can be loaded.
- Thanks to its two movable bars and wide T-shaped profiles, you can have a support surface that allows you to work as if on a workbench for the use of s maller tools, such as hand-held cutters, for example.

	REF.	, € Ţ	\bigcirc	$\langle \overset{\circ}{\star} \rangle$	-	
SLAB TABLE VERSA-TILE	18984	70 7/8x60 1/4x33 1/8"	90.39 lb	98.33 lb	1	9






SLAB TABLE

RUBI

WORKBENCH TO SUPPORT THE CUTTING AND PREPARATION OF LARGE FORMAT MATERIALS Using the tools of the Slab system range.

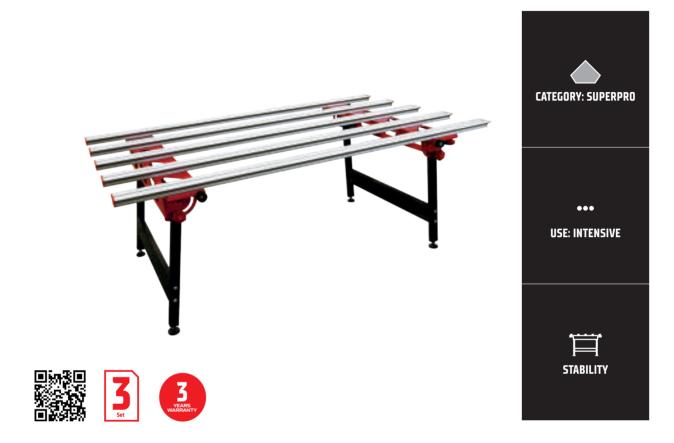

- Extra-reinforced bars thus increasing the rigidity of the workbench.
- The structure of the table together with the leveling feet achieves a greater stability of the set.
- \cdot Assembly and disassembly fast and easy. Easy fix connection system (hammerhead screws).
- Folding legs. Equipped with s ecurity system against involuntary closing.
- Dimensions in working position: 71"x41"x28" (180x104x70 mm).
- Dimensions in transport position: 71"x41"x8" (180x104x20mm).
- Working height: 27 4/7" (70 cm).
- Maximum load capacity: 551 lb (250 kg).

	REF.		\bigcirc	$\langle \star \rangle$	=	
SLAB TABLE	18935	70 7/8x41 1/8x27 1/2"	73.41 lb	79.37 lb	1	16






RUB

RETRACTABLE WORKTABLE

THE RETRACTABLE WORKBENCH PROVIDES SUITABLE SUPPORT FOR ALL TYPES OF WORK.

The larger size is particularly suitable for cutting and handling large tiles.

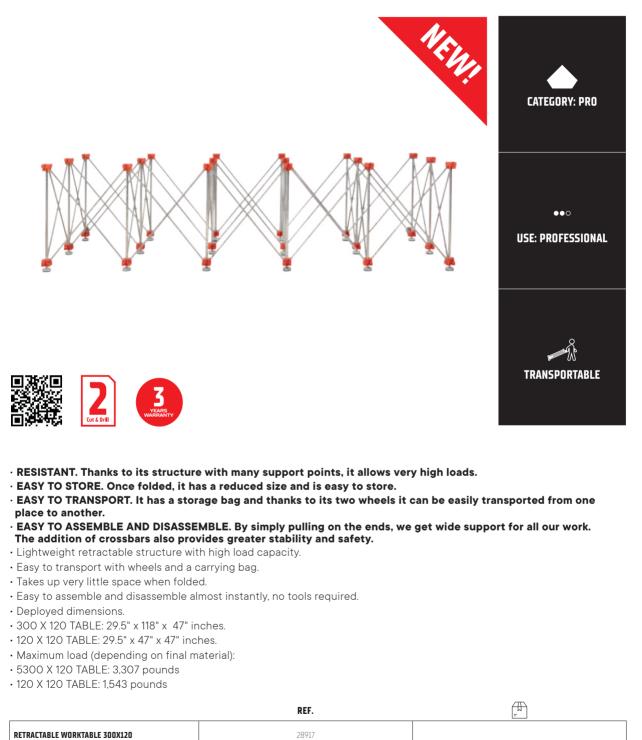

28918

RETRACTABLE WORKTABLE 120X120

HANDLING

RUBI



🛆 CATEGORY: PREMIUM

SLAB TABLE LENGTHEN ACCESSORY

• Accessory for the SLAB VERSA-TILE TABLE (Ref 18984), it allows you to extend the table up to 9.8 feet while maintaining its basic features. Not compatible with 1st generation SLAB TABLES. Consult with your local distributor for details.

	REF.	-	
SLAB TABLE LENGTHEN ACCESSORY	21931	1	6

🔿 CATEGORY: PREMIUM

SLAB TABLE TILE LIFTING ACCESORY (C-15)

- Makes it possible to lift the workpiece 13/4" (4.5) cm from the SLAB TABLE/SLAB VERSA-TILE TABLE profiles (only "T" profiles).
- Ideal for all types of cross-cutting and drilling on the table without the risk of damaging the profiles.

	REF.	
SLAB TABLE TILE LIFTING ACCESORY (C-15)	21975	1



CATEGORY: SUPERPRO

SUPPLEMENTARY GUIDE SET ERGO TILE TRANS / SLIM EASY TRANS PLUS

- ERGO TILE TRANS and SLIM EASY TRANS PLUS has a set of perpendicular guides for increased stability.
- With the supplementary guide set we increase the maximum load capacity to 265 lb (120 kg).
- Increases the rigidity of the unit. Facilitates handling of the pieces. Fast and easy to assemble and disassemble. Black anodized finish.

RFF

Æ

		-
SUPPLEMENTARY GUIDE SET ERGO TILE TRANS / SLIM	10010	1
EASY TRANS PLUS	10017	1


CE

EAE

RUBI TRILLER

COMPACT MANUAL VIBRATOR.

Especially designed for vibrating large format tiles.

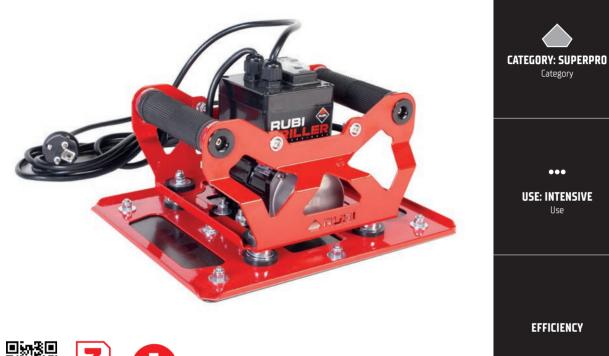





- Compact manual vibrator especially designed for vibrating large format tiles.
- Expels the air trapped under the tile and maximis es the adhesive coverage. (Do not use for a long period of time on the same tile to prevent the adhesive escaping.)
- Suitable for use on floor and wall tiles.
- Compact and light design weighing just 11 Lb (4.8 kg) to facilitate work on walls.
- Floating carbon steel chassis with vibration reduction system for greater user comfort.
- Vibration plate made of PUR plastic, non-marking and easy to change.
- Easy to change, non-marking contact plate.
- Easy to operate tool with ergonomic double grip.
- $\boldsymbol{\cdot}$ Non-adjustable vibration frequency.

	REF.	5	RPM		Ĉ	-
RUBI TRILLER USA	18978	110-130v 50/60Hz	2940	11 1/2x9 1/2x7 1/4"	10.58 lb	1

RUBI TRILLER ENERGY CAS

COMPACT MANUAL BATTERY-POWERED VIBRATOR.

Especially designed for vibrating large-format ceramic sheets.



- Expels the air trapped under the tile and maximis es its wetting. (Do not us e for a long period of time on the same tile to prevent the adhesive escaping.)
- Suitable for use on floor and wall tiling (suitable for vertical and horizontal application, floors and walls).
- Compact and light design weighing just 13 lb (5.8 k g) to facilitate work on vertical surfaces.
- \cdot Floating carbon steel chassis with vibration reduction system for greater user comfort.
- Folded 1/16" (1.5 mm) steel sheet chassis, powder painted in red.
- \cdot Vibration plate made of PUR plastic, non-marking and easy to change.
- $\boldsymbol{\cdot}$ Easy to operate tool with ergonomic double grip.
- It has a speed regulator to adapt the vibration to the material and substrate being worked on. It includes a circuit breaker safety system.
- Powered by a Li-HD 12V 4Ah ba ttery (compatible with 12 V ba tteries from the Rubi CAS platform).
- Includes Rubi BMS (Battery Management System), this is a quality electronic controller that protects the battery system from any overloads and overheating. Furthermore, it optimises the performance of the battery by offering a r egular energy flow and extends the autonomy of use as well as the battery life.

	REF.	5	RPM		\bigcirc	-
RUBI TRILLER ENERGY CAS USA	10973	12V 4Ah	3000	9 1/2x11 1/2x7 1/8"	12.79 lb	1
BATTERY CAS LIHD 12V 4AH	85904	12 V 4AH				1

RUB

QUAKE ENERGY CAS

LIGHT AND COMPACT VIBRATOR

For tiles or porcelain sheets.



- Designed to prevent the generation of encapsulated air bubbles between the adhesive and the back of the ceramic tile, thus facilitating ideal adhesion between the adhesive and the tile.
- The low weight and wireless system make it easy to use on vertical supports and work at height.
- The double handle with bi-ma terial handle offers greater ergonomics and comfort to the user, and its geometry facilitates better control and stability of the tool during vibrating.
- The contact base with the ceramic tile does not leave marks and is easily replaceable.
- \cdot The front handle improves ergonomics and gives the user a better experience.
- Powered by CAS Li-Power 18V 2Ah battery, compatible with Rubi brand battery tools and with all those that are part of the CAS 18V platform.
- \cdot It has a progressive on-off switch (rpm control).
- LED battery-charge indicator.
- New CAS platform LI-POWER 18V-2 Ah battery.

	REF.	5	RPM	$\mathbf{\tilde{Q}}$	Õ	×	=
QUAKE ENERGY CAS USA	60938	18V 2Ah	10000 Max	5 1/8"	3.307 lb	4.41 lb	2
BATTERY CAS LIPOWER 18V 2AH	85901	18V 2AN					1

INSTALLATION

RUB





📥 CATEGORY: PRO 👓 USE: PROFESSIONAL 🕮 SECURITY 👘 USB BATTERY

OCTO-USB ENERGY

- Battery suction cup designed for handling ceramic tiles.
- The suction cup has a 3.7V battery that can be charged via a USB-C cable (Cable included, charger not included).
- Water and dust proof buttons. IP30.
- Digital display with 4 indicators: Vacuum / Release / ON / Charge + MBAR pressure info screen.
- In case of pressure loss, the vacuum pump is automatically reactivated until it reaches working pressure again.
- Includes transport case.
- *Max load capacity: 309 lb (140 kg).only for flat & smooth surfaces and horizontal handling.

	REF.	5	$\mathbf{\tilde{O}}$	Ô	×	-
OCTO-USB ENERGY	66967	3.7V / 2Ah	8 5/8"	2.67 lb	3.307 lb	10

📥 CATEGORY: PRO

TILE GAP CLOSER

- For a precise and easy adjustment of the gap between tiles during floor or wall tiling.
 Large diameter suction cups5 7/8" (150 mm) for any kind of tile surface (flat, rough,
- structured, etc.)
- For lateral displacement of tiles and gap reduction between 0-19/16" (0 40 mm).
- \cdot Enables to equal the level of the tiles between 0– 3/4" (0– 20 mm).
- Maximum lifting capacity up to 100 Kg (220 lbs).

	REF.	$\mathbf{\tilde{O}}$		Õ	×	-
TILE GAP CLOSER	60926	5 7/8"	18 7/8X5 7/8X4 3/4"	7.959 lb	8.47 lb	1





CATEGORY: SUPERPRO

MULTIANGLE

ANGLE TILE REGULATOR

- The angle tile gap regulator is designed for corner adjustment during the installation, especially for large formats that are more difficult to manipulate.
- It allows 90°, 180°, and 270° alignment and tile gap adjustment at the same time. Very useful for countertops installation.
- · Comfortable and accurate adjustment.
- Easy deactivation of the suction cups utilizing the tab at the base of the suction cups.
- Metal gearing for longer life
- Recommended to use in pairs.
- *The pictures of this product might be slightly different from its final version.

	REF.	$\overline{\mathbb{Q}}$	
ANGLE TILE REGULATOR	03995	5 7/8"	1



CATEGORY: PREMIUM	VACUUM	NO MARKS

GSC-200 VACUUM SUCTION CUP

- Suction cup for the manipulation of large ceramic tiles and heavy porcelain slabs.
- Adapts to any surface without leaving any marks.
- Fixing by vacuum manual pump.
- Load loss indicator (red mark).
- Pressure release mechanism.
- Maximum load capacity: 243 lb (110 kg).
- \cdot High resistance plastic body.

	REF.	Ò	×		
GSC-200 GREY VACUUM SUCTION	21951	7 7/8"	3.31 lb	8	90

CATEGORY: PREMIL	М	VACUUM		🕮 SECL	JRITY
SUCTION CUP WITH VA • Suction cup for handling • Special for textured surfa- • Adapts to any surface fir • Suction applied by manu-	I large and h aces. nish. Jal vacuum	neavy tiles.			
 Load loss indicator (red r Pressure-release mechai Maximum load capacity: 	nism.	(a)			
	REF.) Q	×		
SC-200 VACUUM PUMP CUP	18919	7 7/8"	3.31 lb	8	90



CATEGORY: PRO

TRIPLE SUCTION CUP

- Body made of highly resistant aluminium. With ergonomic handle for greater comfort.
- Maximum load of capacity: 220lbs (100 kg).

	REF.		
TRIPLE SUCTION CUP	66904	1	80

RUBI



> CATEGORY: SUPERPRO

ROUGH

RM ROUGH SURFACE DOUBLE SUCTION CUP

- Double suction cup for handling tiles with rough and/or slightly structured surfaces.
- · Body made of highly resistant aluminium.
- Metal reinforcement in the lever base for greater tensile strength.
- · Ergonomic polypropylene handle for faster, safer handling.
- Natural rubber.
- Maximum load capacity: 121lb (55 kg).
- Suction cup diameter: 4 3/4" (120 mm).

	REF.	-	
RM ROUGH SURFACE DOUBLE SUCTION CUP	66952	1	96

ROUGH

84



CATEGORY: SUPERPRO

RM ROUGH SURFACE SUCTION CUPS

- · Suction cups for handling tiles with rough and/or slightly structured surfaces.
- · Injected polycarbonate body. Very light.
- Metal reinforcement in the lever base for greater tensile strength.
- · Ergonomic polypropylene handle, for faster, safer handling.
- Natural rubber.
- Maximum load capacity: 55lb (25 kg).
- Suction cup diameter: 4 3/4" (120 mm).

	REF.		
RM ROUGH SURFACE SUCTION CUPS	66929	1	280

ERGONOMIC



Tool for fixing large-format tile workpieces.

🔿 CATEGORY: PREMIUM

- · It facilitates the extraction of the air that remains between the tile and the adhesive once positioned on the ground for flooring or on the walls.
- · With a bi-material handle for maximum comfort and ergonomics.
- Metal plate for complete rigidity and long durability, reinforced with rubber to avoid damaging the ceramic tiles.

	REF.	\bigcirc	
ERGO TILE BEATER 3 LB	28900	3.09 lb	7
ERGO TILE BEATER 7 LB	28931	7.05 lb	Ĺ



> CATEGORY: SUPERPRO

TILE BEATING BLOCK

- For a good settlement of tiles.
- · Waterproof and high wear resistance wood.
- · Perfect flatness.
- Dimensions: 15 3/4" x 5 3/4" (40x14,5 cm.)
- Ref. 72980 with white natural rubber sheet to prevent damage to the tile.

	REF.	-
TILE BEATING BLOCK 40 X 14,5 CM. WITH RUBBER	72980	1

Æ



RUB

RUBIMIX E-10 ENERGY CAS

FREEDOM OF MOVEMENT.

For cementitious adhesives, resins, paints and other materials.



- \cdot Brushless motor. Maintenance-free and increases the product's lifespan. Maximum efficiency.
- Powered by a CAS Li-Ion 18V 5.2Ah battery pack, compatible with Rubi cordless tools and all of those that form
 part of the CAS 18V platform.
- \cdot Light and strong. Maximum reliability.
- \cdot Dual bi-material grip handle. Better ergonomics, comfort and stability.
- Equipped with a 2-speed gearbox.
- Progressive switch (RPM control) to optimise the mixing of each material.
- Switch safety lock prevents unintentional start-up.
- LED battery-charge indicator.
- Connection to mixing paddles with M14 thread and FAST-IN adapter (included).
- Double-insulated motor.

	REF.		5	RPM	Ô	-	
RUBIMIX E-10 ENERGY CAS USA	26572	\checkmark	18 V	1ª 0-420/2ª 0-700	18,96 lb	1	20
BATTERY RUBIMIX E-10 CAS 18V 5AH	85902		18V			- 1	

RIB

RUBIMIX E-9 ENERGY CAS

LIGHT, RELIABLE & RESISTANT

Ideal for the mixing of cement adhesives, resins, paints, and other materials.



- SAFETY AND MORE COMFORT. Equipped with a safety lock to avoid involuntary startup and a soft start device to control the acceleration of the paddle.
- \cdot ELECTRONIC RPM REGULATOR. Accurate control of the rpm with the 5 positions dial.
- CAS PLATFORM TECHNOLOGY. Li-Power 18V 5,2 Ah CAS battery. Portability and, wireless (no cable) manageability.
 BRUSLESS MOTOR. High efficiency. Less maintenance.
- Double-handled with bi-material handles. Improves ergonomics, comfort, and stability.
- LED indicator of battery charge level.
- 5.2Ah Battery, at 100%, allows the user to mix 3 bags of 55 lb of tile adhesive. we do not recommend mixing more than 55 lb at once.
- Double insulation of the motor.
- IP20 protection.
- Maximum mixing paddle's head diameter: 4.7" inches (120 mm)
- Mixer equipped with a FAST-IN adapter that allows the use of mixing paddle rods with M14 thread.
- Includes a M120 FAST-IN detachable paddle.
- It also includes a transport case and tools to remove the FAST-IN adapter and use M14 mixing paddles.

	REF.		5	RPM	Ô	=			
RUBIMIX E-9 ENERGY CAS USA	61995	\checkmark	18	1ª 0-700	11.02 lb	1			-
BATTERY RUBIMIX E-10 CAS 18V 5AH	85902		18V						


*The pictures of this product might be slightly different from its final version.

215

RUBIMIX-9 SUPERTORQUE

VERSATILE ELECTRIC MIXER, SUITABLE FOR CEMENTITIOUS ADHESIVES, RESINS, PAINTS AND OTHER MATERIALS.

Facilitates homogeneous mixing of the materials and prevents the creation of bubbles and/or lumps.

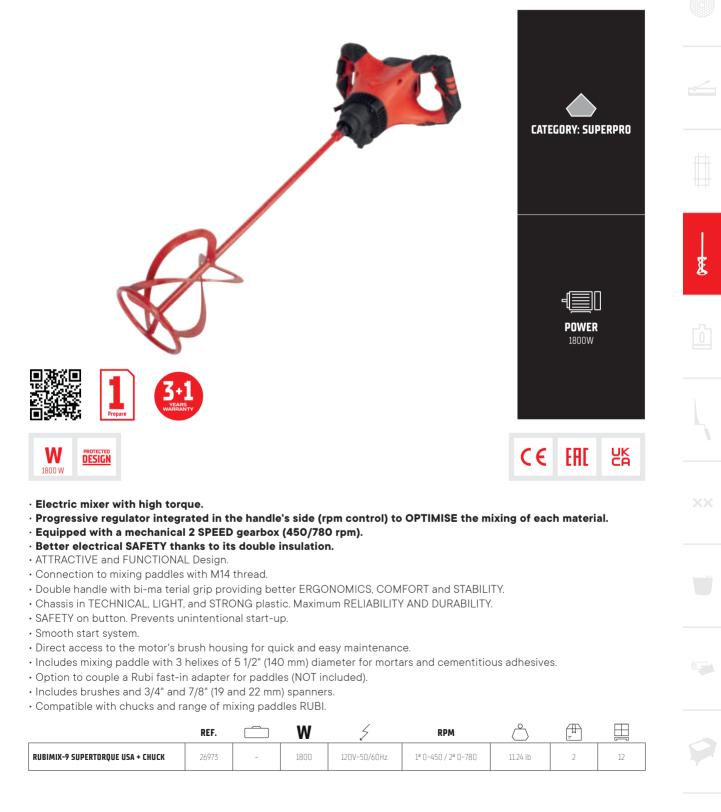

RUBIMIX-9 N

VERSATILITY BY CHANGING THE MIXING PADDLE.

For cementitious adhesives, resins, paints and other materials.



- · Bimaterial double handle grip. Improved ergonomics and comfort.
- \cdot 2 speed gearbox and progressive switch (R.P.M. regulation) to optimize the mixing of each material.
- \cdot Quick and easy to change the brushes. High comfort.
- · Safety lock to prevent unexpected start.
- Power: 1200 W.

- Double insulation.
- Direct connection M14 thread.
- Electronic regulator (1st 0-650 r.p.m. / 2nd 0-850 r.p.m.). Ø maximum paddle: 5 1/2" (140 mm).
- Ø 4 3/4" (120 mm) mixing paddle included.

	REF.		W	5	RPM	Ô	-	
RUBIMIX-9 N USA + CHUCK	24949	-	1200	110–130V 50–60 Hz.	1ª 0-650 / 2ª 0-850	12.35 lb	2	24

EI I B

RUBIMIX-8 EASY PRO

MULTI-MATERIAL ELECTRIC MIXER, SUITABLE FOR CEMENTITIOUS ADHESIVES,

RESINS, PAINT, AND OTHER MATERIALS.

Facilitates a homogeneous mixing of materials, avoiding the formation of bubbles and/or lumps.



RUBIMIX-7 MINIMAX

MULTIPURPOSE MIXER.

Suitable for cementitious adhesives, resins, paint, and other materials.





- · Electric mixer, PRO quality.
- \cdot Electric speed regulation through a regulating wheel.
- · Connection to mixing rods with M14 thread.
- Attractive, modern, and functional RUBI design.
- Mixer with a bi-material double handle provides greater ERGONOMICS, COMFORT, and STABILITY.
- Includes mixing rod with 5" (120 mm) propellers for mortars and cementitious adhesives.
- $\boldsymbol{\cdot}$ Chassis in TECHNICAL, LIGHT, and RESISTANT plastic. Maximum RELIABILITY and DURABILITY.
- \cdot SAFETY power button. Prevents unintentional start-up.
- Includes brushes and 19 fixed wrenches.
- $\boldsymbol{\cdot}$ Compatible with RUBI drill chuck and range of mixing blades.

	REF.	W	5	RPM	Õ		
RUBIMIX-7 MINIMAX	61991	1200 W	110–130V 50–60Hz.	-	9.17 lb	2	18

Mixing

• ADAPTABLE TO RUBI MIXERS AND OTHER BRANDS.



RUB



MIXING PADDLES

CATEGORY: SUPERPRO

ADAPTER FAST-IN THREAD

- Adapter for use of the FAST-IN mixer paddles.
- Transforms threaded connection M14x2 to quick connection system FAST-IN.
- Adaptable to any mixer with M14x2 thread.

	REF.	
FAST-IN ADAPTER	76907	1

FHST



- CATEGORY: SUPERPRO TILE ADHESIVE FAST-IN CONNECTION

 MIXER PADDLES FAST-IN 3HELIX
 - To mix cement mortars.
 - Helix head with 3 paddles for better mixing. Increases performance by 15% compared to the 2-blade head.
 - Less effort in mixing.
 - Less vibrations. Greater comfort.
 - Fast connection without tools FAST-IN.
 - Compatible with RUBIMIX-9 N PLUS, RUBIMIX E-10 ENERGY, RUBIMIX-16

ERGOMAX or FAST-IN (Ref	. 76907) Adaptable to any mixe	r with M14x2 connection.
-------------------------	--------------------------------	--------------------------

	REF.		<u>}</u>	<u>k</u>	<u>-</u>	Ħ
MIXER PADDLE M-120-FI 3H	76942	33.07-55.12 lb	23 5/8"	4 3/4"	-	-
MIXER PADDLE M-140-FI 3H	76943	55.11-88.18 lb	20 3/0	5 1/2"	2	84

CATEGORY: PRO	TILE ADHESIVE	HIGHER PERFORMANCE

MORTAR MIXER PADDLE THREAD M14 3 HELIX

- To mix cement mortars.
- Helix head with 3 paddles for better mixing. Increases performance by 15% compared to the 2-blade head.
- Less effort in mixing.
- Less vibrations. Greater comfort.
- M14 x 2 thread connection.
- Adaptable directly to RUBIMIX range and other brands.

	REF.				
MORTAR MIXER M-100 R USA	25978	33.07-44.09 lb	21 5/8"	3 7/8"	6
MORTAR MIXER M-120 R USA	25979	33.07–55.12 lb	23 5/8"	4 3/4"	2
MORTAR MIXER M-120-R 3H LONG	26953				
MORTAR MIXER PADDLE M-140-R 3H	76919	55.11-88.18 lb	⊃7 E /0"	5 1/2"	-
MORTAR MIXER PADDLE M-160-R 3H	76940	66.14-132.28 lb	23 5/8"	6 1/4"	2





CATEGORY: PRO

PAINT MIXER EGG BEATER

• The standard ML-100 rod head drag blades are round rod.

• This reduces the mixing capacity of the rod, but facilitates its use since there is also less resistance.

	REF.	E	£	<u>-</u>
PAINT MIXER 27"	76908	5"	27"	6

CATEGORY: PRO

STANDARD MIXER HEXAGONAL PADDLE

- To mix thinset, mortar, grout and other setting materials.
- Reduces the creation of bubbles.
- $\boldsymbol{\cdot}$ White zinc coating for rust protection.
- 27" hexagonal shaft.

	REF.		<u>k</u>]	<u>s</u>	
MORTAR MIXER M-100 L USA	24957	33.07-44.09 lb	21 5/8"	3 7/8"	6

CATEGORY: SUPERPRO

CHUCK

- For the use of dry cutting diamond drill bit with electric drill. (M14)
- Use without hammer.

	REF.	
СНИСК	71967	1







DIAMOND DRILL BITS - WET CUT

\cdot For wet drilling of wall tiles, floor tiles, porcelain and other materials.



RUB



🔶 PRO 🛛 💹 PORCELAIN T	ILE	P	> ELECTRIC I	DRILL WITI	HOUT PER	CUSSION
ASY GRES DRILL BITS						
Diamond drill bits to be used with The quality of the diamond allows and glass. Ideal to install bathroom accessor ceramic surfaces. They must always be used with th refrigeration ensuring a high accu Average life between 5 and 10 hol Body made of steel and bit made Lateral opening to improve coolin solid waste produced after the dri Recommended speed of use betw material to be drilled. To achieve a better finish and a lo the adequate speed of use and to	the c ies ar e EAS iracy a les de of ele g of t lling c ween	Irillin nd ar SY G and pen cetro he d of the 400	ng of cerami ny type of de RES guide w good results ding on the odeposited c Irill bit and to e hole. and 1000 r. of the drill bi	cs, porcela ecorative a which allow a material. liamond. p allow the p.m. dependent, it's impo	accessorie vs their ac e eliminati nding of t rtant to o	es over lequate on of he bserve
Supplied in blister.	REF		RPM	Ē		Ħ
EASY GRES DRILL BIT 7/32" (6 MM.)	0492	2				
EASY GRES DRILL BIT 1/4" WET CUT	0591	.3	1000 max.	1"	10	
EASY GRES DRILL BIT 5/16" (8 MM.)	0492	!3				4600
EASY GRES DRILL BIT 3/8" WET CUT	0591	.4				
EASY GRES DRILL BIT 1/2" (12 MM.)	0492	21				
EASY GRES DRILL BIT WET CUT 13/16" (20 MM)	0594	1				
EASY GRES DRILL BIT WET CUT 1 1/8" (28 MM)	0594	F2				
EASY GRES DRILL BIT WET CUT 1 3/8"(35 MM)	0594	13				
EASY GRES DRILL BIT WET CUT 15/8" (40 MM)	0594	4				
EASY GRES DRILL BIT 1 3/4" (43 MM.)	0596	15				
EASY GRES DRILL BIT 2 1/4" (55 MM.)	0596	⁵⁷	500 max.	1 1/16"	1	
EASY GRES DRILL BIT 2 1/2" (65 MM.)	0596	19				
EASY GRES DRILL BIT 2 11/16" (68 MM.)	0597	8				
EASY GRES DRILL BIT 3" (75 MM.)	0597	'9				
EASY GRES DRILL BIT 4" (100 MM.)	0598	31				
EASY GRES DRILL BIT 4 3/4" (120 MM.)	0598	32				

Ď

Drilling

RUB



🔶 PRO 🔰 🎆 PORCELAIN TILE 🕴 ELECTRIC DRILL WITHOUT PERCUSSION

EASY GRES DRILL BIT SETS 0 7/32" TO 1/2" (6 - 12 MM.)

• The EASY GRES guide allows holes both vertically and horizontally, thanks to its functional design incorporating a water tank with flow control valve.

• The EASY GRES guide attaches easily to any surface, thanks to its renewable adhesives.

	REF.	RPM	ĿĿ	<u>-</u>	H
EASY GRES DRILL BIT 7/32" (6 MM.) SET	04927				800
EASY GRES DRILL BIT 5/16" (8 MM.) SET	04928	1000	1"	10	420
EASY GRES DRILL BIT 3/8" (10 MM.) SET	04929	1000 max.	1 I	10	800
EASY GRES DRILL BIT 1/4" AND 3/8" (6.5 AND 10 MM.) Set	04909				810

ELECTRIC DRILL WITHOUT PERCUSSION



	🔶 PRO	PORCELAIN TILE
2.2	KIT EASY GRES	i PLUS
	• The kit include: • MULTIDRILL gu • Water tank and	uide.

• EASY GRES drills Ø 3/4", 11/8", 13/8", 13/4", 2", 21/2" and 3" (20, 28, 35, 43, 50, 65 and 75 mm.) and case.

	REF.	RPM	Ē	<u>-</u>
KIT EASY GRES PLUS	50937	500 max.	1 1/8"	1

SUPERPRO

FORAGRES DRILL BITS 0 13/16" TO 4 3/4" (20 - 120 MM.)

- To drill floor tiles, porcelain tiles, granite and marble.
- Always use cooled with water and non-hammer electric drill.
- 0 15/8" (40 mm.) drill bit, designed for housing of toilet flushing mechanisms. Supplied in blister.

	REF.	RPM	Ē	-
FORAGRES DRILL BIT 3/4" (20 MM.)	04970			1
FORAGRES DRILL BIT 1 3/8" (35 MM.)	04972		11/8"	
FORAGRES DRILL BIT 1 1/8" (28 MM.)	04971			
FORAGRES DRILL BIT 1 5/8" (40 MM.)	04963	000		
FORAGRES DRILL BIT 2" (50 MM.)	04973	900 max.		
FORAGRES DRILL BIT 2 1/2" (65 MM.)	04974			I
FORAGRES DRILL BIT 2 11/16" (68 MM.)	04918			
FORAGRES DRILL BIT 3" (75 MM.)	04975		1 1/4"	
FORAGRES DRILL BIT 4" (100 MM.)	04976	450 max.	11/8"	
FORAGRES DRILL BIT 4 3/4" (120 MM.)	04977	4JU IIIdX.	1 1/ 0	



Drilling

RUB



SUPERPRO	PORCELAIN TILE	EXTRA LONG Life	ELECTRIC DRILL WITHOUT PERCUSSION
KIT FORAGRES			
 Kit includes: MULTIDRILL Guide. 			
• Tank and hose.			
 Diamond drill bits Ø \$ Case. 	3/4", 1 1/8", 1 3/8", 1 3/4", 2	2" and 2 11/16" (Ø	20, 28, 35, 43, 50, 68 mm).

	REF.	RPM	Ē	
KIT FORAGRES	50903	900 max.	1 1/8"	1

PORCELAIN TILE LONG LIFE GRINDER

Designed for the fast drill of any kind of ceramic tiles including porcelain, but also

suitable to drill natural stone as granite or marble, and sinthered stone. Vacuum brazed type drill bits that provides a very fast dry drilling with very good

DIAMOND DRILL BITS - DRY CUT

• FOR DRY DRILLING OF WALL TILES, FLOOR TILES AND PORCELAIN TILES.

> PREMIUM

DRYGRES PREMIUM DRILL BITS



RPM

14000



٢<u>0</u>



Drilling

RUB



SUPERPRO PORCELAIN TILE GRINDER ELECTRIC DRILL WITHOUT

KIT DRYGRES

- They can be used both with grinders or drill without hammer, using the included adapter kit.
- The kit includes: MULTIDRILL guide with carry case. Ref.50917, Ref.50936,
- Ref.50996. Dry cutting diamond drill bits:
- Ø1 1/8"(28mm),1 3/8"(35mm),1 3/4"(43mm)& 2 11/16"(68mm).
- Ø1 1/8" (28mm),1 3/8" (35mm),1 3/4" (43mm),2" (50mm)&2 11/16" (68mm).
- Ø1/4"(6mm),5/16"(8mm),3/4"(20mm),1 3/8"(35mm),50 &2 11/16"(68mm).

	REF.	RPM	Ē	-
KIT 5 BITS DRYGRES	50936	14000 max.	1 3/8"	1

SUPERPRO	PORCELAIN TILE	GRINDER	ELECTRIC DRILL WITHOUT PERCUSSION

DRYGRES DRILL BITS

• For dry drilling in ceramic, porcelain, natural stone and other materials.

- Maximum operating speed 14,000 r.p.m. M14 thread finish.
- They can be used both with grinders or drill without hammer, using the included adapter kit.
- Usable with grinder. Supplied in blister.

	REF.	RPM	Ē	-
DRYGRES DRILL BIT Ø 1/4" - THREAD 5/8" USA (6 MM.)	05993			
DRYGRES DIAMOND DRILL Ø 8MM 5/8 "USA	05932			
DRYGRES DIAMOND DRILL Ø 20MM 5/8 "USA	05934			
DRYGRES DRILL BIT Ø 1 1/8" - THREAD 5/8" USA (28 MM.)	05902			
DRYGRES DRILL BIT Ø13/8" - THREAD5/8" USA (35 MM.)	05987	14000 max.	1 7/16"	1
DRYGRES DIAMOND DRILL Ø 43MM 5/8 "USA	05936			
DRYGRES DRILL BIT Ø 2" - THREAD 5/8" USA (50 MM.)	05903			
DRYGRES DIAMOND DRILL Ø 65MM 5/8 "USA	05937			
DRYGRES DIAMOND DRILL Ø 75MM 5/8 "USA	05938			



SUPERPRO SUPERPRO	I TILE LONG LIFE	CORDLESS POWER DRILL
SUPERPRO DORCELAIN	ITILE LONG LIFE	CORDLESS POWER DRILL

KIT DRYGRES 4DRILL

- For dry drilling in porcelain stoneware. Suitable for other ceramic materials, natural stone and artificial stone.
- Hexagonal connection Compatible with battery drills.
- Kit composed of:
- DRYGRES 4DRILL diamond drills dry cut Ø1/4"(6mm), 5/16"(8mm), 3/8" (10mm) and 1/2" (12 mm).
- With case.

	REF.	RPM	=
KIT DRYGRES 4DRILL	05939	1000 min.	1

xx





SUPERPRO PORCELAIN TILE LONG LIFE CORDLESS POWER DRILL

DRYGRES DRILL BITS 4DRILL

- Specially designed for dry drilling in porcelain stoneware. Suitable for other ceramic materials, natural stone and artificial stone.
- $\boldsymbol{\cdot}$ With high resistant welding of the diamond grains for a longer duration.
- "Easy-Start" Without slipping. Suitable for work without a centering guide.
- Perfect for cordless drills (1000 2500 rpm).
- \cdot Reinforced body with grub screw for better performance and rigidity, thus
- maintaining the wax on the tip of the drill (no wax Ø11/8" & Ø13/8"Models).
- \cdot High quality finish.
- Designed to be used exclusively with either a cordless drill or an electric drill.
- Their hexagonal connection allows them to adapt quickly to drills with a 3/8" (10 mm) chuck.

	REF.	RPM	Ē	
DRYGRES DRILL BITS 4DRILL Ø 1/4" (6 MM.) HEX - USA	05951			
DRYGRES DRILL BITS 4DRILL Ø 5/16" (8 MM.) HEX -USA	05952		1 7/16"	
DRYGRES DRILL BITS 4DRILL Ø 3/8" (10 MM.) HEX -USA	05953	1000		
DRYGRES DRILL BITS 4DRILL Ø 1/2" (12 MM.) HEX -USA	05954	1000 min.		1
DRYGRES DRILL BITS 4DRILL Ø 9/16" (14 MM.) HEX -USA	05956			1
DRYGRES DRILL BITS 4DRILL Ø 3/4" (20 MM.) HEX -USA	05957		1 9/16"	
DRYGRES DRILL BITS 4DRILL Ø 1 1/8" (28 MM.)	05970	2000 min		
DRYGRES DRILL BITS 4DRILL Ø 1 3/8" (35 MM.)	05971	2000 min.		

X 🖌	SUPERPRO DORCELAIN TILE LONG		LANDSCAPING
	DIAMOND GRINDING BITS		
	 Suitable for working with natural stone and porcelai To enlarge or modify the diameter and shape of a p Can also be used for smoothing, polishing or cleaning holes. For dry use with M14 thread grinders. High diamond guality and concentration for a long 	oreviously mac ing the interio	
	 Diamond fixed using a vacuum brazing process. Provides a good finish thanks to its #50-60 grit size Stable performance with minimum deviation. The diamond grinding bits ARE NOT SUITABLE for r 	ze.	
	 Diamond fixed using a vacuum brazing process. Provides a good finish thanks to its #50-60 grit size Stable performance with minimum deviation. 	ze.	
	 Diamond fixed using a vacuum brazing process. Provides a good finish thanks to its #50-60 grit size Stable performance with minimum deviation. 	ze. making holes.	
	 Diamond fixed using a vacuum brazing process. Provides a good finish thanks to its #50-60 grit size Stable performance with minimum deviation. The diamond grinding bits ARE NOT SUITABLE for r 	ze. making holes. REF.	
	 Diamond fixed using a vacuum brazing process. Provides a good finish thanks to its #50-60 grit size Stable performance with minimum deviation. The diamond grinding bits ARE NOT SUITABLE for r 	ze. making holes. REF. 06988	

Ď

ACCESSORIES FOR DIAMOND DRILL BITS

· GUIDANCE SYSTEMS, AND OTHER ACCESSORIES FOR DIAMOND DRILLS.





🌰 CATEGORY: SUPERPRO

MULTIDRILL GUIDE

- By fixing with suction cup, allows horizontal and vertical holes in the right place, preventing the drill bit from slipping.
- Compatible with dry cutting diamond drill bits, removable diamond drill bits Ø 1/4" to 9/16" (6–14 mm.) and wet cutting diamond drill bits Ø 13/16" to 3" (20–75 mm.).

		REF.	
MULTID	RILL GUIDE	51921	1



🔶 CATEGORY: SUPERPRO

ZERO DUST GUIDE

- Rubber edge to ensure dust containment.
- Maximum dust suction capacity with dual air chambers.
- Rubber edge to ensure dust containment.
- 2 3/4" inches maximum diameter (70mm)
- \cdot Compatible with hose from 1" to 1.5" size
- \cdot Zero dust guide for dry drilling with a drill or an angle grinder.
- · Includes an additional brush.

	REF.	
ZERO DUST GUIDE	40923	1

\sim	CATI	EGO	RY:	PF	I

TANK FOR MULTIDRILL GUIDE

- Bottle of 1200 ml. volume, with manual pressure pump.
- Includes 3/32" (2 m). hose.

	REF.	
TANK AND HOSE FOR MULTIDRILL GUIDE	50947	1





PORCELAIN TILE GRINDER

ELECTRIC DRILL WITHOUT PERCUSSION

ELECTRIC DRILL ADAPTER

• For the use of dry cutting diamond drill bit with electric drill. (M14) • Use without hammer.

	REF.	RPM	Ē	-
M14 ADAPTER FOR ELECTRIC DRILL	05976	14000 max.	13/8"	1

TROWELS AND NOTCHED TROWELS

• THE WIDE RANGE OF NOTCHED EDGES (SQUARED, TRIANGULAR, OR ROUNDED) IS ADAPTED

NOTCHED TROWEL YW

- TO ALL CERAMIC MATERIALS AND FORMATS AND DIFFERENT BONDING MATERIALS.
- NOTCHED EDGES AVAILABLE FROM 1/8" (3 X 3 MM.) TO 13/16" (20 X 20 MM.).



RUB




CATEGORY: PREMIUM	OPEN HANDLE	RUBIFLEX

TECH-FLEX NOTCHED TROWELS

- Open RUBIFLEX handle for ergonomics.
- The trowel can be left resting on the edge of the carrycot.
- · The curved and toothed plate is made of rubber for lightness and safety because it does not cut like metal films.
- The curved shape of the plate is comfort engineered because it reduces operator effort and reduces adhesive loss during application.

	REF.	يت		<u>-</u>
TECH-FLEX NOTCHED TROWELS (6X8) 1/4"X5/16"	66972	1/4"	5/16"	-
TECH-FLEX NOTCHED TROWELS (8X10) 5/16"X13/32"	66973	5/16"	3/8"	1
TECH-FLEX NOTCHED TROWELS (10X12) 13/32" X1/2"	66974	3/8"	1/2"	I

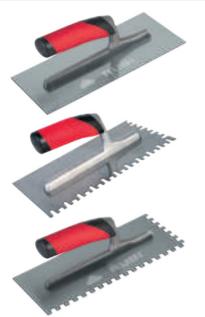

CATEGORY: SUPERPRO	JPEN H <i>P</i>	NDLE		RUI	BIFLEX	
TROWELS & NOTCHED TROWELS OF	PEN RL	IBIFLEX	HANDL	E		
• Steel plate special high wear resistanc • coat.(STEEL) • Ergonomic RUBIFLEX handle with two • Perfect flatness of the plate.			n protecti	on by c	clear	
	REF.	لتنا			-	
STEEL NOTCHED TROWEL 1/8"X1/8" (3X3 MM.)	76961	1/8"	1/8"			
STEEL NOTCHED TROWEL 11" (28 CM.) 3/16"X3/16" (4.5X4.5 MM.)	76965	3/16"	3/16"			
STEEL NOTCHED TROWEL 11" [28 CM.] 1/4"X1/4" [6X6 Mm.]	76962	1//-	1/4"			
STEEL NOTCHED TROWEL 11" (28 CM.) 1/4"X13/32" (6X10 MM.)	76966	1/4"	3/8"	1	6	270
STEEL NOTCHED TROWEL 11" [28 CM.] 1/2"X1/2" [12X12 Mm.]	76967	1/2"	1/2"]		

STEEL NOTCHED TROWEL 11" (28 CM.) R-3/8" (10 MM.) 3/8" 76964 72949 1/4 / 1/2" 5/16 / 1/4"

CATEGORY: SUPERPRO

OPEN HANDLE

RUBIFLEX

WOODEN

STAINLESS JAGGED TROWEL

• Tile adhesive (thin-set) application.

CATEGORY: SUPERPRO

- Aluminum structure. Light and resistant. Bi-material handle RUBIFLEX. Improves ergonomics. Stainless steel plate.
- · Plate's fixation by 6 electro welded points. Irremovable and maximum mechanical resistance.

	REF.	
PRO STAINLESS STEEL 1/4" X 1/4" TROWEL	76952	
PRO STAINLESS STEEL 5/16"X 5/16" TROWEL	76953	,
PRO STAINLESS STEEL 3/8" X 3/8" TROWEL	76954	Ō
PRO STAINLESS STEEL 1/2" X 1/2" TROWEL	76955	

CLOSED HANDLE

• Steel plate special high wear resistance, corrosion-protected by clear coat (STEEL).



1	



and a state of the state of the

 Perfect flatness of the plate. The notches 13/16" x 13/16" (20 x 20 mm uneven floors. Allows more material thic 		loped fo	or dosin	g of glu	e morta	r on
	REF.	സ്			<u>_</u>	
STEEL TROWEL 19" (48 CM.)	65988	-"	-"			

Stainless steel plate special high wear resistance (INOX)

19" (48CM) TROWELS & NOTCHED T. CLOSED WOOD HANDLE

SIEEL IROWEL 17 [40 CM.]	01700	-	_			
STEEL NOTCHED TROWEL 19" (48 CM.) 1/4" X 1/4" (6 X 6 MM.)	65958	1/4"	1/4"			
STEEL NOTCHED TROWEL 19" (48 CM.) 3/8" X 3/8" (8 X 8 MM.)	65959	3/8"	3/8"		6	360
STEEL NOTCHED TROWEL 19" (48 CM.) 13/32" X 13/32" (10 X 10 MM.)	65983	D/ 0	2/0	-	0	000
STEEL NOTCHED TROWEL 19" (48 CM.) 1/2" X 1/2" (12 X 12 MM.)	73973	1/2"	1/2"			
STEEL NOTCHED TROWEL 19" (48 CM.) 13/16" X 13/16" (20 X 20 MM.)	75962	3/4"	3/4"			

CATEGORY: SUPERPRO

16" NOTCHED TROWELS

- · Double stainless steel for corrosion resistance.
- · Spread more adhesive with each pass.
- · Ideal for tile with an edge 15" and large.

	REF.	സ്			_	
TROWEL 16 "1/2 X 1/2 X 1/2	26976	1/2"	1/2"	1/2"		
TROWEL 16 " 1/4 X 1/2 X 1/4	26977			1/4"		7/0
TROWEL 16 " 1/4 X 3/8 X 1/4	26978	4 // 8	1/4"		6	360
TROWEL 16" 1/4 X 1/4 X 1/ 4	26979	1/4"				

BRICK TROWELS

PERFECT ADAPTION IN SHAPES, SIZES AND SPECIFIC CHARACTERISTICS MEETING THE DEMANDS OF EACH MARKET.



CATEGORY: SUPERPRO	PFP05 • Ergonomic RUBIFLEX.						
	2.90.00.00 1020 22.4	REF.	18	2	×	Õ	-
	PFP05-180 MM. (7 1/16")	75418	7 1/8	" 4	1/8"	0.63 lb	,
1000	PFP05-200 MM. (7 7/8")	75420	7 7/8	- 4	3/8"	0.70 lb	6
CATEGORY: SUPERPRO	PFP19						
	• Ergonomic RUBIFLEX.						
		REF.	18	2	×	Ĉ	
	PFP19- 80 MM. (4 5/16")	76808	4 1/4	' 3	1/8"	0.34 lb	,
- Contraction of the second se	PFP19- 90 MM. (5 1/16")	76809	5 1/8	3	1/2"	0.37 lb	6
CATEGORY: SUPERPRO	PFP33						
	• Ergonomic RUBIFLEX ł	nandle.					
			REF.	ıb	K	Ô	
-	PFP33-170X50 MM. (6 11/16" X 1	15/16"]	79050	6 3/4"	1"	0.34 lb	6

SCRAPERS





PRO HEAVY DUTY SCRAPER 5"

- To remove old coverings (ceramic tiles, wallpaper, vinyl tiles, carpets, paint, etc..).
- · Ideal for repair jobs (substitution of broken tiles) and renovations.



	REF.	-
PRO HEAVY DUTY SCRAPERS 5 "	66953	1
5 BLADES FOR PRO HEAVY DUTY SCRAPERS 5 "	66954	



JOINT SCRAPER

- Ergonomic handle with two electroplated tungsten carbide plates with high resistance to abrasion.
 - \cdot Useable with 1, 2 or 3 plates depending on width of the joint.
 - $\boldsymbol{\cdot}$ Supplied in blister.

	REF.	-	
JOINT SCRAPER	65907	5	600
SPARE JOINT SCRAPER	71974	10	4600



RUBISCRAPER-250

ELECTRIC GROUT SCRAPER

RUBI

For grout removal without damaging the tile.



- · Ergonomic design and bi-material finishing, for greater comfort and better stability.
- · Light and resistant. Maximum reliability.
- · Blades made in tungsten carbide. Resharpenable for a greater performance. Patented model.
- \cdot Fast locking / unlocking system for easy assembly of blade.
- · Ideal for repair work (replacement of broken tiles).
- Equipped with 3 speeds. V1: 6500 i.p. / V2: 8000 i.p. / V3: 9500 i.p.

PATENTED

- Power: 250 W.
- Stroke length: 3/32" (2 mm).
- Double insulation.
- Blades for joints of 1/16" (1.5 mm) (ref. 66810, use only with speed 1) and 1/8" (3 mm) (ref. 66812) included.
- Includes 2 special blades (steel made) to remove rests of thin-set from the back of the tiles or on the substrate.
- With transport case.

	REF.	5	W	
RUBISCRAPER-250 USA	66942	120V-60Hz	250	1

CATEGORY: SUPERPRO

RUBISCRAPER BLADES

• Resharpenable and easily interchangeable blades, available for 1/16" (1.5 mm) (use only with speed 1) and 1/8" (3 mm) grout sizes.

Æ

	REF.	<u>д</u>
1.5 MM (1/16") BLADE FOR RUBISCRAPER	66810	1
3 MM (1/8") BLADE FOR RUBISCRAPER	66812	1

OTHER ACCESORIES

	T/SPHERICAL SIDES		
Allows to strike at any an	ngle. One flat surface and	I the other sphe	rical.
	REF.	-	H
WHITE RUBBER MALLET 17.6 OZ. (5	66906 GR.)	6	33
NIPPERS FOR PORCEL	AIN TILES		
 Specially for cutting name Replaceable scoring wh Equipped with tungster last longer. With a gentle start getting worn. 	ieels (Ref:01953).	with titanium su	
	REF.	-	
NIPPERS FOR PORCELAIN TILES	83942	5	765
• Tungsten carbide edge • To rectify cuts of ceram	of great hardness.		
Tungsten carbide edge	of great hardness. ics.	6	
Tungsten carbide edge To rectify cuts of ceram	of great hardness. ics. REF.		
Tungsten carbide edge To rectify cuts of ceram	of great hardness. ics. REF.		-
Tungsten carbide edge To rectify cuts of ceram NIPPERS FOR CERAMIC TILES	of great hardness. ics. REF. 65926 e areas which are awkward	6	-
Tungsten carbide edge To rectify cuts of ceram NIPPERS FOR CERAMIC TILES SHAPE TEMPLATE Copies the shape of the	of great hardness. ics. REF. 65926 e areas which are awkward	6	-







LATEX GLOVES

- · Ideal for wet or abrasives tasks.
- For minimal risks only.
- Made of 100% latex.
- Conforms to EN420.

	REF.	-	
LATEX GLOVES	20907	12	3240



RINI

RLB

MANUAL GROUT MORTAR APPLICATOR

- Great capacity (650 cc) grout mortat applicator.
- · Very light structure made of aluminum.
- It allows an easy, quick and clean application.
- Reduce consumption of grout and after grouting residue.
- Pressure adjustable with trigger.
- Replaceable and adjustable nozzles to the joint width.
- · Also usable for the application of silicone and PU rigid and flexible cartridges.
- $\boldsymbol{\cdot}$ Quick and clean application.

	REF.	
MANUAL GROUT MORTAR APPLICATOR 650 CC.	65990	1



I in i


R.

RUBILEVEL ANTISHOCK

- · Levels manufacturated in reliable, resistant aluminum.
- $\boldsymbol{\cdot}$ Double machining to ensure a constant precision in the top face and the base.
- Accuracy: 1/50" (0,5 mm/m).
- Three bubbles for checking horizontal, vertical and and 45° levels.
- Double and ergonomic bi-material handle.
- Rubber protector at the ends.
- DUAL view vertical vial for front measurements. Eliminates parallax error.
- MAGNIFIED horizontal vial for the CLEAREST view of the bubble.

	REF.	<u>-</u>	
RUBILEVEL ANTISHOCK 24" (60 CM.)	76932		672
RUBILEVEL ANTISHOCK 32" (80 CM.)	76933	0	384
RUBILEVEL ANTISHOCK 40" (100 CM.)	76934		392
RUBILEVEL ANTISHOCK 48" (120 CM.)	76935		272

xx



- 4 uses in 1: Work bench, scaffold, dolly and creeper.
- Foldable, easy to transport and storage.
- Double sided board: MDF wood side (work bench function) and non-slippery PP plastic side (rest of functions). EASY interchangeable.
- Reinforced stainless steel area for harder jobs. Avoids damages on wooden surface.
- Angle conveyor and rule printed on the wooden side. Also includes a hole for small drillings (max. 25 mm) and hand tools insterts on metal frame.
- Folded table: 31 1/2"x20 1/2"x5" (80x52x12,5cm).
- Unfolded table: 45 1/4"x20 1/2"x 31 1/2" (115x52x80cm).

	REF.		
FOLDING 4-IN-1 WORKING TABLE	66924	1	16

m

RUBI LUMEO





CAS BATERY COMPATIBLE >CATEGORY: PREMIUM



18V

RUBI LUMEO ENERGY CAS

- Universal battery-operated work light.
- · Lightweight and powerful for professional users.
- Extremely robust (IKO7) and versatile with 5-level adjustable light output (from 400 to 4000 lumens).
- Stylish design with carrying handle and support for flexible positioning through direct mounting on the TRIPOD accessory.
- Suitable for both indoor and outdoor work (IP67).
- Operates with an 18V CAS battery.
- · Includes a small spare battery in case of failure or battery depletion.

	REF.		
RUBI LUMEO ENERGY CAS	10940	1	



RUBI TRIPOD LUMEO

- The practical design of the TRIPOD makes it an indispensable accessory for the stationary positioning of work lights, especially for illuminating a specific work area.
- Extendable from 4.4 ft to 9.8ft, the tripod offers total flexibility to place the work light at the required height and the option to tilt the mounted light to provide the optimal light angle.
- With its compact design, the tripod is easy and convenient to transport and install wherever necessary.
- Features QUICK RELEASE function and is made of black painted aluminum. The tripod is very durable and can be used both indoors and outdoors.
- Maximum load 22 lbs (10kg).
- Its robust construction makes it safe even when fully extended.
- Net weight 13lbs (6 kg).

	REF.	
RUBI TRIPOD LUMEO	10939	1

COMPATIBILITY

RUBIMIX E-9 ENERGY CAS	18 V 5.2 Ah
RUBIMIX E-10 ENERGY CAS	18 V 5.2 Ah
RUBI LUMEO	18 V 5.2 Ah
QUAKE ENERGY CAS	18 V 2.0 Ah
RUBI TRILLER ENERGY CAS	12 V 4.0 Ah



FLOATS FOR PLASTER



PLASTER FLOATS

• Flexible polyethylene and nonstick base.

	REF.	
PLASTIC HANDLE FLOAT 12" X 5" (30 X 14 CM.)	71904	6

RUBBER GROUT FLOATS





CATEGORY:

REPLACEABLE GROUT FLOAT PRO

Grout Float (Ref.84924) with sheet resistant to abrasion.

· Replaceable with spare (ref. 84925).

	REF.	=
SPARE GROUT FLOAT PRO	84925	15
REPLACEABLE GROUT FLOAT PRO	26906	

Grout Float PRO 9"x4" (22.5cmx10cm). (Ref.84926), with white rubber sheet wear

REF.

84926

6

 \square

384









CATEGORY:

- **GROUT FLOATS SUPERPRO PLASTIC**
- Plastic ergonomic handle.

GROUT FLOATS PRO • Black foam rubber.

• resistant.


GROUT FLOATS PRO

- · Available in different hardnesses of rubber for best finish as the joint width.
- Rubber float trowel, with white rubber sheet wear resistant.
- · Solid rubber float, with hard rubber abrasion resistant. Thermoflex float, medium hardness.

	REF.		
RUBBER GROUT FLOAT SUPERPRO	65971		
SOLID RUBBER GROUT FLOAT SUPERPRO	65972	6	540
THERMOFLEX RUBBER GROUT FLOAT SUPERPRO	65973		

TILE SPACERS & WEDGES

• TILE SPACERS, " T " SPACERS AND WEDGES FOR THE CORRECT PLACEMENT OF TILES. QUALITY BASE MATERIAL.

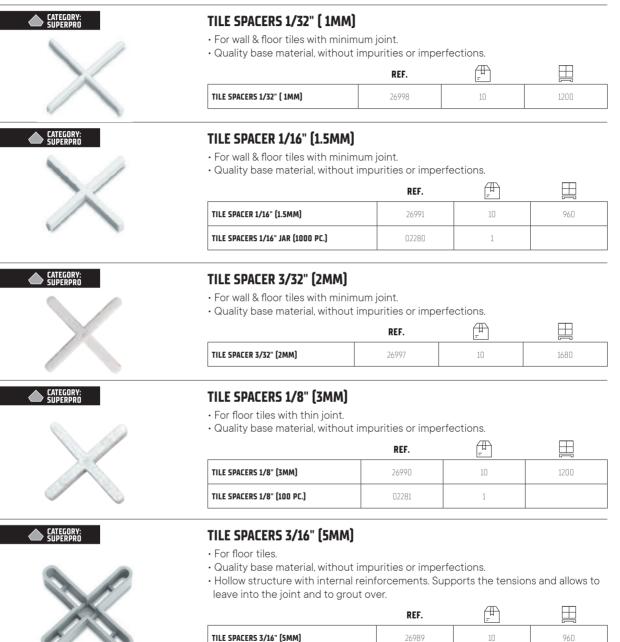

CATEGORY: Superpro



TILE SPACERS 1/4" (6MM)

TILE SPACERS 5 MM. (500 PC.) JAR

• For floor tiles.

- · Quality base material, without impurities or imperfections.
- Hollow structure with internal reinforcements. Supports the tensions and allows to leave into the joint and to grout over.


02282

1

	REF.	-	
TILE SPACERS 1/4" (6 MM.) - (B-100 U.)	02036	10	540

RUB

××

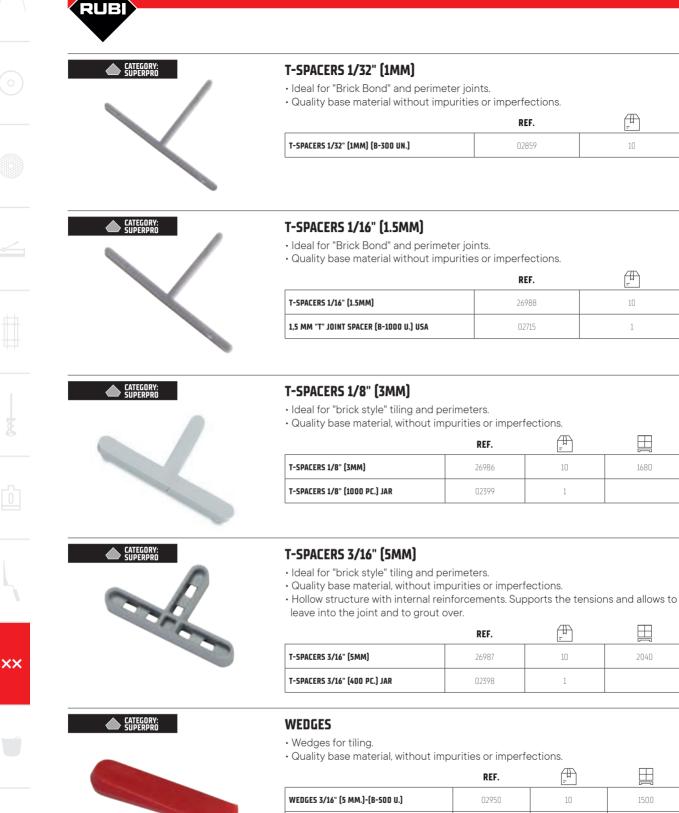

Æ 10 WEDGES 3/16" (500 PC.) JAR 02283 1

Æ

10

Æ

10

1

H

1680

 \square

2040

╓

10

Æ

10

1



HORSESHOE SPACERS

• For Rectify the position of the pieces during installation.

 Thanks to their geometry, horseshoe shaped, these spacers can be combined together to give the same function as a traditional crosshead or "T".

	REF.	=
HORSESHOE SPACER 1/16 "(B-300U) USA	13841	10
HORSESHOE SPACER 1/8 "(B-250U) USA	13840	1



INSTALL, SNAP, REUSE

Upgrade your work with Delta System. High quality materials that guarantee a perfect snap during the levelling process saving you time in money RUBI

RUBI

DELTA LEVEL SYSTEM: LEVELING SYSTEM

SYSTEM TO FACILITATE THE LAYING AVOID LIPPAGE AND IMPROVING FINISHING.





KIT DELTA LEVEL SYSTEM

• The kit consists of 1 pliers, 100 strips and 100 reusable wedges.

• Packaged in a handy bucket.

	REF.		
KIT DELTA LEVEL SYSTEM 1/16" (1/8"-1/2")	03914		22
KIT DELTA LEVEL SYSTEM 1/32" (1/8"-1/2")	03956	I	80



DELTA LEVEL SYSTEM STRIP

- Made in PP.
- Different models available:
- Strip 1/32" (1 mm) / 1/16" (1,5 mm) and 3/32" (2 mm). for tiles from 1/8" to 1/2" (3 to 12 mm).

- Strip 1/16" (1.5 mm) and 3/32" (2 mm) for tiles from 7/16"-7/8" (11 to 20 mm).
- 1/8" (3 mm) and 3/16" (5 mm) strip for tiles from 1/4"-9/16" (6 to 15 mm).
- 3/16" (5 mm) strip for tiles from 1/2"-7/8" (13 to 20 mm).

	(COLOR)
	12 12 5150
100	







	REF.		Ħ
200 CLIPS 1/32" DELTA LEV. SYS [1/8"-1/2"]	02851	21	168
400 CLIPS 1/32" DELTA LEV. SYS	02839	13	104
[1/8"-1/2"] 240 CLIPS 1/32" DELTA LEV. SYS			
[1/8"-1/2"]	02870	1	16
200 CLIPS 1/16" DELTA LEV. SYS MADE [1/8"-1/2"] MADE	03937	21	168
400 CLIPS 1/16" DELTA LEV. SYS MADE [1/8"-1/2"] MADE	03938	13	104
2400 CLIPS 1/16" DELTA LEV. SYS MADE [1/8"-1/2"] MADE	03939	1	16
200 CLIPS 3/32" DELTA LEV. SYS [1/8"-1/2"]	02853	24	192
400 CLIPS 3/32" DELTA LEV. SYS [1/8"-1/2"]	02854	13	104
2400 CLIPS 3/32" DELTA LEV. SYS [1/8"-1/2"]	02856	1	16
200 CLIPS 1/8" DELTA LEV. SYS [1/4"-9/16"] MADE IN USA	03941	21	168
400 CLIPS 1/8" DELTA LEV. SYS [1/4"-9/16"]	03942	11	88
2400 CLIPS 1/8" DELTA LEV. SYS MADE [1/4"-9/16"] MADE	03943	1	16
200 CLIPS 3/16" DELTA LEV. SYS [1/4"-9/16"]	06827	21	168
400 CLIPS 3/16" DELTA LEV. SYS [1/4"-9/16"]	06828	11	88
2400 CLIPS 3/16" DELTA LEV. SYS [1/4"-9/16"]	06829	1	16
100 CLIPS 1/16" DELTA LEV. SYS (7/16"-7/8") TALL	02846		320
100 CLIPS 3/16" DELTA LEV. SYS (1/2"-7/8") TALL	06981	20	240

XX

CATEGORY: SUPERPRO	DELTA LEVEL SYSTEM PLIERS FAS	T-FIX		
PATENTED	 FAST-FIX regulation system. Without Made of steel with bi-material soft-gr Protective cover on the pressure can 	ip handles for gre	ater ergonor	nics.
		REF.	0	
	DELTA LEVEL SYSTEM PLIERS FAST-FIX	03901		6
CATEGORY: SUPERPRO	DELTA LEVEL SYSTEM WEDGE N			
	Prevents the generation of lippage diagonal on walls.			Ū
	 Recommended for formats of 11 " 13/1 back buttering. 	0X II 13/10 (30X3	0 cm) and at	oove, always with
		REF.	0 cm) and at	pove, always with
		, ,	·	
	back buttering.	REF.	-	
	back buttering. Delta level system wedge N (B-100 UN)	REF.	12	192
	DELTA LEVEL SYSTEM WEDGE N (B-100 UN) DELTA LEVEL SYSTEM WEDGE N (B-200 UN)	REF. 03948 03949 E. 03950 E. 03950	12 13	192
CATEGORY: SUPERPRO	Delta level system wedge N (B-100 UN) Delta level system wedge N (B-200 UN) Delta level system wedge N (B-400 UN) Delta level system wedge N (B-400 UN)	REF. 03948 03949 E. 03950 E. 03950	12 13 6	192 104 48

	REF.	× / =]	\Box	-
LEVELING CERAMIC PROTECTOR	16902	100	10.80254 lb	6

Accessories for tile fixing and finishing

CYCLONE LEVEL SYSTEM: LEVELING SYSTEM

• SYSTEM TO FACILITATE THE LAYING AVOID LIPPAGE AND IMPROVING FINISHING.





	CATEGORY:
\frown	SUPERPRO



CYCLONE KIT

- The kit consists of 300 clips and 100 reusable caps.
- Packaged in a practical bucket.

	REF.	=
KIT CYCLONE 1/16" (1,5 MM)	35964	7
KIT CYCLONE 1/8" (3 MM)	35965	· C
KIT CYCLONE 3/16" (5 MM)	35903	1

CYCLONE CAPS

- Reusable, special 1/4" (6 mm) external thread.
- Eccentric detail for better force concentration.
- Crowned area for better grip. Dimensions: 2 " 5/16 x 2 " 5/16 x 1 " 1/2 (5 9x59x38 mm).
- \cdot Supplied in reusable container.

	REF.	-	
CYCLONE CAPS (B-100)	35949		80
CYCLONE CAPS (B-300)	35950	1	32
CYCLONE CAPS (B-1200)	35951		16

XX

Ø

CATEGORY: Superpro

RUBI

CYCLONE FLAT BASE

- · Available in various models:
- Flat base clips of 1mm (1/32"), 1.5mm (1/16"), 2mm (3/32") and 3mm (1/8"), 5mm (3/16").
 Visual thickness identification by colour.

	REF.		
CYCLONE L.S. 1/32" 1 MM FLAT BASE (B-100)	35937	36	432
CYCLONE L.S. 1/32" 1 MM FLAT BASE (B-300)	35938	12	144
CYCLONE L.S. 1/32" 1 MM FLAT BASE (B-2400)	35939	1	20
CYCLONE L.S. 1/16" 1,5 MM FLAT BASE (B-100)	35940	36	432
CYCLONE L.S. 1/16" 1,5 MM FLAT BASE (B-300)	35941	12	144
CYCLONE L.S. 1/16" 1,5 MM FLAT BASE (B-2400)	35942	1	16
CYCLONE L.S. 3/32" 2 MM FLAT BASE (B-100)	35943	36	432
CYCLONE L.S. 3/32" 2 MM FLAT BASE (B-300)	35944	12	144
CYCLONE L.S. 3/32" 2 MM FLAT BASE (C-2400)	35945	1	16
CYCLONE L.S. 1/8" 3 MM FLAT BASE (B-100)	35946	36	432
CYCLONE L.S. 1/8" 3 MM FLAT BASE (B-300)	35947	12	144
CYCLONE L.S. 1/8" 3 MM FLAT BASE (C-2400)	35948	1	16
CYCLONE L.S. 3/16" 5 MM FLAT BASE (B-100)	35900	36	432
CYCLONE L.S. 3/16" 5 MM FLAT BASE (B-300)	35901	12	144
CYCLONE L.S. 3/16" 5 MM FLAT BASE (C-2400)	35902	1	16

CYCLONE CROSS BASE

- Available in various models: Cross base clips of 1.5 mm (1/16") and 3 mm (1/8") . Visual thickness identification by colour.

	REF.	
CYCLONE L.S. 1/16" 1,5 MM CROSS BASE (B-100)	35952	36
CYCLONE L.S. 1/16" 1,5 MM CROSS BASE (B-300)	35953	12
CYCLONE L.S. 1/8" 3 MM CROSS BASE (B-100)	35955	36
CYCLONE L.S. 1/8" 3 MM CROSS BASE (B-300)	35956	12







CYCLONE CROSS T BASE

• Available in various models: Cross base clips of 1.5 mm (1/16") and 3 mm (1/8") . Visual thickness identification by colour.

	REF.	
CYCLONE L.S. 1/16" 1,5 MM CROSS T BASE (B-300)	35959	17
CYCLONE L.S. 1/8" 3 MM CROSS T BASE (B-300)	35962	12

LEVELING CERAMIC PROTECTOR

• To protect the tiles against scratching or abrasive damage caused by friction between wedges, caps, and delicate tiles, particularly in the presence of sand or hard particles.

- For DELTA System wedges or CYCLONE system caps.
- Reusable when maintained clean.

	REF.	≫≀ 🗗	Ĉ	<u>-</u>
LEVELING CERAMIC PROTECTOR	16902	100	10.80 lb	6

XX

_m

TILE LEVEL QUICK: LEVELING SYSTEM

\cdot system to facilitate the laying avoid lippage and improving finishing.



• Reusable caps. Made of POM. Its design ensures even distribution of the contact pressure.

	REF.	=	
TILE LEVEL CAPS (B-100 U.)	02890	10	300
TILE LEVEL CAPS (B-400 U.)	02892	8	64



- Made of technical polymer non-hygroscopic.
- Doesn't need soaking before use.
- The strip thickness guarantees minimum grout of 1 mm.
- \cdot Ensures continuous tension between strips and capsgrrove.
- $\boldsymbol{\cdot}$ Grooved bases to improve the wetting of ceramic tile.

	REF.	=	
TILE LEVEL (B-100 U.) STRIP	02893	/	180
TILE LEVEL (B-400 U.) STRIP	02895	0	48



TILE LEVEL QUICK HEAVY DUTY PLIERS

- Metal version of the plastic TLQ pliers, fully compatible.
- Made of zinc-plated carbon steel.
- Ergonomic bi-material handle (plastic and rubber).
- \cdot Height adjustment with regulation screw (no tools required).

	REF.	
TILE LEVEL QUICK HEAVY DUTY NIPPER	03900	1

KITRA

KIT TILE LEVEL QUICK

• The set consists of pliers, 100 strips and 100 reusable caps. Packaged in a handy bucket.

	REF.	[-]
KIT TILE LEVEL QUICK	02941	1





RUB

PLASTIC TUBS "FLEXTUB"

• THE HIGH QUALITY PLASTIC TUBS ARE SUITABLE FOR USE IN VARIOUS INDUSTRIES, COMBINE Optimal resistance with good flexibility and are very lightweight. Their shape and the design of their handles means that any of the plastic tubs in this range can be carried in one hand with no risk of breakage or fatigue.



THE COMMON CHARACTERISTICS OF ALL THE PLASTIC BASKETS ARE:

- MADE WITH HIGH QUALITY POLYETHYLENE. GREATER ROBUSTNESS.
- SUITABLE FOR ALL TYPES OF WORK IN THE CONSTRUCTION INDUSTRY AS WELL AS OTHER INDUSTRIES.
- \cdot VERY THICK WALLS FOR MAXIMUM STRENGTH AND RESISTANCE.



PLASTIC TUB №. 4 "FLEXTUB" (55 L.)

- Greater comfort during transport. For easy waste collection.
- Lightweight.



KNEE PADS, ERGONOMIC SEAT AND CUSHION





SR-1 ERGONOMIC SEAT

- Aluminum chassis high strength and stability.
- Allows an ergonomic position of comfort.
- Prevents injuries in knees and back.
- · Adjustable seat height and angle for optimum adaptation to each use.
- Robust construction with 7 heavy duty wheels.
- Includes tray for tools and accessories.
- Ideal for flooring, parquet installation, cleaning and other operations on pavements tasks.
- · Replaceable ergonomic kneepads.
- · Maximum weight: 286 lb (130 kg).

	REF.		
SR-1 ERGONOMIC SEAT	81999	1	18



CATEGORY: SUPERPRO

ALL TERRAIN 4X4

PROFESSIONAL KNEE PADS N

• Useful for any task that requires kneeling for prolonged periods of time.



- · Ideal for much more comfortable installation of tiles and flooring in general in different phases of the installation: substrate preparation, installation, grouting and cleaning
- · LARGE SUPPORT surface area for optimal STABILITY and COMFORT.
- Double strap for keeping the knee pad tightly fitted to the leg at all times.
- Avoids blocking of blood flow at the back of the knee.
- · Quick strap fastening.
- · In accordance with EN14404.
- Performance level: 1.

	REF.		
SET OF PROFESSIONAL KNEE PADS N	66957	6	192





CATEGORY: SUPERPRO HARD SURFACES

GEL COMFORT KNEE PADS

- Ergonomic design professional and high comfort knee pads.
- Its design combines the use of hard materials against impacts and uneven floors and soft materials therein, adapted to the user's anatomy.
- · In addition to protecting the user's knees through the use of silicone gel inside, its studied ergonomics provide them with great stability, preventing ligaments and tendons fatigue.
- They incorporate two bands Neoprene closure.
- Conforms to EN14404.
- Protection level: 1.

	REF.		
GEL COMFORT KNEE PADS	81998	6	96



CATEGORY: PREMIUM

HARD SURFACES

GEL DUPLEX KNEE PADS

- · Professional knee pads with ergonomic design. Highly comfortable.
- Their design combines the use of hard materials to protect against impacts and uneven floors and soft materials adaptable to the user's anatomy on the inside.
- · Besides protecting the user's knees thanks to the silicone gel in their inside, their studied ergonomics gives them great stability, preventing ligaments and tendons fatigue.
- Wide range of uses thanks to their design " two in one ":
- · Can be used together with the external rubber protection of great stability and resistance.
- With the main body only, less bulky, which allows the knee to slide without problem over smooth surfaces.
- · They incorporate a double fastener, inferior and superior, easy adjustable.
- Conforms to EN14404.
- Protection level: 1.

	REF.	-	
GEL DUPLEX KNEE PADS	81989	6	144

E,

SPONGES, FLOATS AND PADS

• COMPLETE RANGE OF SPONGES AND GROUT FLOATS FOR CLEANING AND PROTECTION OF TILES.





RUBI

SPONGE FLOAT PRO

Polyurethane foam floats with high absorption.

• The PLUS model has slits for increased performance drag dirt.

	REF.		\bigcirc	\bigcirc		
SPONGE FLOAT PRO PLUS	24988	11 1/8x5 1/2x1 1/8"	3	3	10	240





SPONGE FLOAT SUPERPRO

- Floats with SUPERPRO sponge for grout cleaning and finishing.
- PLUS model has cuts for increased performance in wiping away dirt.

	REF.		\bigcirc	\bigcirc	<u>_</u>	
SPONGE FLOAT SUPERPRO	20924	11.1 (0.7 5 (0.8	4	-	10	180
SPONGE FLOAT SUPERPRO PLUS	20908	11 1/8x7 5/8x"	1	2	10	120

REPLACEABLE SUPERPRO SPONGES 12" X 5 11/32" (30X13,5CM)

- Float sponges for cleaning and finishing tile and grout jobs. Interchangeable sponges adaptable to the ergonomic handle. (Ref. 22912) and secure attachement to other brands.
- Sponges available with different levels of absorption and resistance to abrasion. Comfortable and secure attachement system.
- PLUS models have cuts for increased drag on the dirt.

	REF.		\bigcirc	\bigcirc	-	Ħ	
FLOAT WITH REPLACEABLE SUPERPRO SPONGE	22900		1	2		10.0	
FLOAT WITH REPLACEABLE SWEEPEX SUPERPRO Sponge	22916		22/10		180		
REPLACEABLE SUPERPRO SPONGE	22910	11 3/4x5 3/8x1 5/8"		1	7		320
REPLACEABLE SUPERPRO SPONGE PLUS	22918		Ţ	2	10	-	
REPLACEABLE EPOXY CELLULOSE SUPERPRO SPONGE	22932	11 7 //	4	4			
REPLACEABLE SWEEPEX SUPERPRO SPONGE	22922	11 3/4x5 3/8x1 1/8"	11 5/4X5 5/8X1 1/8	3	7		240
REPLACEABLE SWEEPEX SUPERPRO SPONGE PLUS	22914	11 3/4x5 3/8x1 5/8"	5	3		320	

FLOAT WITH 10" (25 CM.) SUPERPRO PADS


- To clean ceramic surfaces and other materials.
- Float with three different roughness replaceable pads; soft (red), medium (blue) and hard (brown).
- · Float with three very stuff pads (white).
- 3 sets of pads: very soft (white), soft (red), medium (blue) and hard (brown).
- Available set of 3 pads of different roughness: soft (red), medium (blue) and hard (brown).

	REF.		- <u>-</u>
FLOAT + 3 MIXED PADS	20900		
3 PADS REPLACEMENT SET - MEDIUM	20973	07/0.77/0.1	1
3 PADS REPLACEMENT SET - HARD	20974	9 7/8x3 7/8x"	
3 PADS REPLACEMENT SET - SOFT/MEDIUM/HARD	20902		

CATEGORY: SUPERPRO







SUPERPRO SPONGES

- PLUS models have cuts for increased drag on the dirt.
- Ref. 20905 and 20906 available in Palbox.

	REF.		\bigotimes	\bigcirc	-	
SUPERPRO SPONGE	20905	77/0 51/0 77//	1	-	24	384
MIXED SUPERPRO SPONGE	20906	7 7/8x5 1/8x2 3/4"	6	2	24	288
EPOXY CELLULOSE SUPERPRO SPONGE	22928	6 3/4x3 7/8x1 5/8"	4	4	12	792

CATEGORY: PRO

PRO SPONGES

- Polyurethane sponges.
- HIDRO models are highly absorbent.



	• •					
	REF.		\bigcirc	\bigcirc		
STANDARD PRO SPONGE	24966	6 3/4x3 7/8x2 3/4"	2	1	24	720

LATEGORY: PRO

HIDRO ROUNDED SPONGES MIXED

- Mixed Rounded Sponge vacuum packaged 30 units, not individually packed.
- Polyurethane sponges.
- Mixed models : heavy duty grouting and haze buffer sponges.

	REF.	-
MIXED ROUNDED SPONGE MIXED VACUUM PACKAGED (30UN)	68997	60



HIDRO ROUNDED SPONGES

- Convenient box with 2 bags x 30 Hidro Rounded Spongevacuum packaged. Not individually packed.
- Polyurethane sponges.
- HIDRO models are highly absorbent.
- Extra large all purpose sponge.

	REF.	-
HIDRO ROUNDED SPONGE VACUUM PACKAGED (60UN)	68999	60



BASE SPONGE EASY SQUEEZE

• Hydro floor trowel, 16.5" x 5" x 1.18" (42x13x3 cm), easy to replace with velcro. Includes detachable aluminum handle.

	REF.	-
BASE SPONGE WITH STICK EASY SQUEEZE	68992	1
BASE SPONGE EASY SQUEEZE	68993	



WASHBOYS

RUBI

• DIFFERENT MODEL OF WASHBOYS FOR CLEANING AWAY GROUT OR FINAL CLEAN OF TILING JOB.





RUBICLEAN EASY SQUEEZE

 Bucket for cleaning floors and walls. Foot-operated mechanism to facilitate the wringing of the sponge with handle. Two rollers for manual wall trowels. Highcapacity tray, 32 liters. Two wheels and handle lock for improved transport.
 *The pictures of this product might be slightly different from its final version.

	REF.	-		$\langle \star \rangle$
RUBICLEAN EASY SQUEEZE	68991	1	8	24.2506 lb



RUBICLEAN TRIPLE SUPERPRO

- Plastic washboy, lightweight and high resistance.
- Equipped with 3 spiral rollers for further draining.
- Includes wheels and carrying handle.
- Capacity: 5.3 gl. (24 l.)
- Useful capacity: 2.2 gl. (10 l.)
- Dimensions: 20 7/8" x 11 1/32" x 14 9/16" (53 x 28 x 37 cm).
- Supplied assembled and in 1 unit box.

	REF.	=	
RUBICLEAN TRIPLE SUPERPRO WASHBOY	21995	1	18



RUBICLEAN TRIPLE SUPERPRO

- Composed by:
- Rubiclean Eco (Ref. 24948), Sponge standard (Ref. 24966), Rubber Trowel for Joints (Ref. 24969) and High absorption sponge plus with handle (Ref. 84927).
- Capacity: 5.2 gl. (20 l.)

	REF.	
RUBICLEAN ECO KIT BUCKET	68910	1



DISPLAYS

• VARIOUS DISPLAY UNITS TO SHOW RUBI PRODUCTS, OPTIMIZING SPACE AVAILABLE AND HELPING TO PROMOTE SALES.



HIDRO ROUNDED SPONGE-DISPLAY


- Sponges provides individually packed and with cardboard display. Polyurethane sponges.
- HIDRO models are highly absorbent.

MIXED ROUNDED SPONGE-DISPLAY

• Extra large all purpose sponge.

	REF.	-
HIDRO ROUND SPONGE	68995	120





	REF.	-
HIDRO ROUND MIXED SPONGE	68996	120

				EGORY ERPRC	SUP	\bigtriangleup
					- 501	
	V		4			
	-			_		
	-		100	100		
	1.42	15	83.	- 62		
	- 69	50	5.6			
			21	100		
		1.1		25		
	1.00	200	a.,			
	180		÷ .			
	1.1	1.0	1	12		
			24	100		
				1.00		
		100				
				-		
,		Sec.	10.000			
	1	time		1		

SUPERPRO SPONGE

- Contains x135 units of ref. 20905.
- Dimensions: 23" x 15" x 47" (60 x 40 x 120 cm).

	REF.	-	
SUPERPRO SPONGE PALBOX	69955	1	4

3 DISPENSERS DELTA LEVELLING DISPLAY

• Dispenser display stand with 3 cardboard containers, for the Delta levelling range..

	REF.	- -
3 DISPENSERS DELTA LEVELLING DISPLAY	93906	1



RUBI



MANUAL CUTTERS RACK (1 FACE)

- Metal display stand with the capacity to display a manual cutter.
- It incorporates an anti-theft system.
- Dimensions: 84" x 14" x 23" (2130x350x582 mm).

	REF.	
MANUAL CUTTERS RACK (1 FACE)	93138	1

DISPLAY FOR MANUAL TILE CUTTERS Capacity to display 3 manual tile cutters. Dimensions: 46" x 22" x 10" (1170x560x260)

• Dimensions: 46" x 22" x 10" (1170x560x260 mm).

		-	
DISPLAY FOR MANUAL CUTTERS.	90305	1	6

 \square



DISPLAY FOR RUBI MIXERS

- Display stand to hold two mixers and various mixing paddles.
- Dimensions: 79" x 48" x 29 1/2" (2000x1211x750 mm).

	REF.	=
RUBIMIX RANGE DISPLAY 2021	91908	1
DISPLAY FOR RUBI MIXERS	26447	

DISPLAY RANGE LEVELING

Cardboard dispenser display for the leveling range.

	REF.	-
DISPLAY RANGE LEVELING	93056	1

•

CARDBOARD GENERAL DISPLAY

- Cardboard general display.Dimensions: 1.40 m high, 41 cm.
- wide, 32 cm deep.

	REF.	=
CARDBOARD GENERAL DISPLAY	91905	1






GENERAL DISPLAY

- 1-metre wide general display stand.
- With a frame, stand and display tray. (Ref. 93911).
- With display bars. (Ref. 93910).
- If you want to set up multiple display stands, calculate the number of bars you will need.

	REF.	
STRUCTURE + HEADER + GENERAL DISPLAY TRAY 1000mm +30 price Hooks	93911	
2 UN. GENERAL DISPLAY BARS	93910	
TRAY GENERAL DISPLAY 40" (1000 MM.)	90570	
TRAY GENERAL DISPLAY 25" (650 MM.)	90571	1
SHORT HOOK FOR GENERAL DISPLAY	90681	1
2 UN. GENERAL DISPLAY BARS	90810	
HOOK WITH PRICE TAG	90656	
PRICE HOLDER HOOK LABEL	90709	

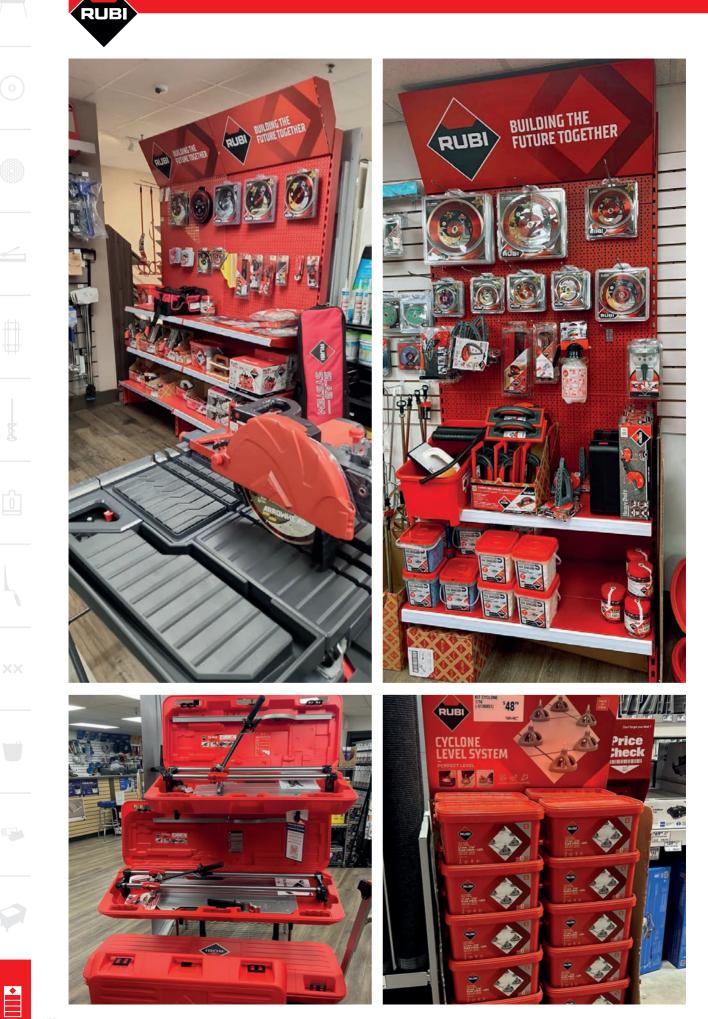

SYMBOLOGY AND CERTIFICATIONS

In this catalogue to provide reader's with the maximum amount of information and to be as clearly as possible, we have used the following symbols:

1 Prepare	Prepare		Units per pallet	() +	Segment Thickness			Cutting Length	- T	Folding legs
2	Cut & Drill		Units per box		Diamond band height		and the second	Cutting height		Mobile cart
3	Set	\longleftrightarrow	Cutting length		Diamond band width		<u>,</u>	Separator power	Š	Adjustable flow
4	Grout		Diagonal cutting length	Ē	Maximum drill length		(F	Fixed separator		Tip-up table for mitring
5	Clean		Cutting height		Mixing capacity		Æ	Mobile separator	<u>2</u> 3	Zero Dust
		in the second	Separator power	<u>}</u>]	Max Height of the head			Repetitive cuts		Level
<u>31</u>	3+1 years warranty	\bigcirc	Net weight without packaging		Rod's head diametre			45° cuts	*	Laser
<u>32</u>	3+2 years warranty	(*)	Gross weight	رتى	Wide notched trowel		(Base accessory	Ċ	C3 system
3	3 year warranty		With carrying case		Notched height trowel		Ŧ	Angular measuring	\bigcirc	Wet cutting
PATENTED	Patented	$\langle \hat{\Box} \rangle$	Weight with carrying case	r	Notched Radius Trowel		E	Dual reinforced guide	\otimes	Dry cutting
PATENT	Patent Pending	5	Power supply	18	Trowel length		PURE	PURE POWER		1 hour of continous work maximum, recommended
PROTECTED DESIGN	Patent Pending	RPM	Revolutions per minute	K	Trowel width		₩ ₩	MAGNET	3	by TNO 3 hours of continous work maximum, recommended
		W	Watts	=)/#	Bags per box		SMART	Smart Power		by TNO
CE	European Regulatory Commission		Mitre cutting length	≈'⊡	N° tile spacers per bag		<u></u>	One Hand Action		
EAC	Russian legislation	, illin	Mitre Thickness cut		Height of bucket			Back pack optional		
UK	EAC	x2	Maximum cutting thickness - 1 stroke or 2 strokes		Bottom diameter		(1)	Bearing system		
CA we	UK TÜV safety		Length Width Height		Top diameter			Easy fix		
	rules		Wall chaser effect	×	Useable height		Щ	Ergonomic		
	o innovation for life	Þ.	Cut length with saw effect		Sponge size		P	Soft		
	A D 1	\bigcirc	With blade	\bigcirc	Absorption level (1–4)		ar Manand	INCH/MM. ruler		
2	Product Design	$\mathbf{\tilde{O}}$	Outside diameter		Resistance to abrasion (1-4)		-	Power		
	Award		Inside diameter		. /		<u> </u>	Foldable head	USA	. : Ref. 93390
	A	÷	Disc segment high				<u>O</u> 1	Plunge Effect	8 41	3797 933
						1				. 50



Rubi Group comply with the Directive 2002/96/EC on waste electrical and/or electronic and Directive 2002/95/EC on the restriction of certain substances in their manufacture, applying the law of each member state according to EEC your specific criteria. (WEEE, WEEE, ECORAEE, etc ...) (RoHS).

Images are for illustration purposes and may change without notice.

*The gross weight of some electrical machines may vary depending on the type of pallet and carton type used in packaging.

**Any manipulation or modification of machine voids the warranty. Our warranty covers defects in manufacturing or assembly in accordance with the applicable law.

Note: Any reproduction of all or part of this catalogue without prior approval of Germans Boada, SA is forbidden



RUBICLUB

JOIN THE COMMUNITY OF 70.000+ EXPERTS IN THE ART OF TILING

1. SIGN UP IN LESS THAN 1 MINUTE

- 2. EXTEND THE WARRANTY OF YOUR PURCHASES EASILY
- **3. GAIN ACCESS TO EXCLUSIVE BENEFITS AND GIFTS**

SCAN THE QR CODE OR ENTER WWW.RUBI.COM





Club Rubi Email clubrubi@rubi.com

RUBI GROUP

RUBI TOOLS USA Inc. 10702 NW 147th Street, Suite 100 Hialeah Gardens, FLORIDA 33018 USA P, 1 305 715 9892 F. 1 305 715 9898



f 🕩 🎔 🗿 in

rubi.com





